


Female cordset DT6S-G-BK3M-PUR/1,5

- Hard-wearing PUR cable
- Degree of protection IP68
- Free of paint wetting interfering substances
- Resistant to microbes and hydrolysis
- UV resistant
- Oil resistant
- Snap locking

Female cordset single-ended Deutsch socket straight, 6-pin, PUR cable black



Dimensions

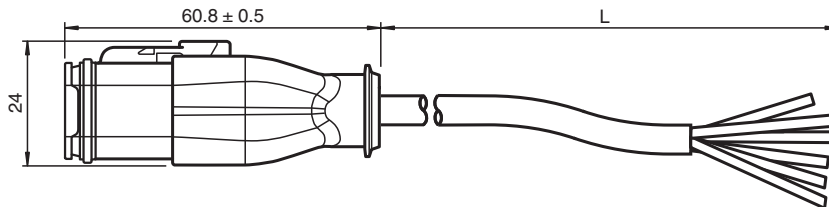

Technical Data

General specifications

Connector 1

Connection	socket
Construction type	Deutsch connectors
Style	straight
Locking	snap locking
Number of pins	6

Connector 2

Connection	cable end
------------	-----------

Electrical specifications

Operating voltage	U_B	max. 48 V AC / 60 V DC
Operating current	I_B	max. 8 A per contact

Conformity

Degree of protection	EN 60529
Oil resistance	IEC 60881:404

Ambient conditions

Ambient temperature	
Plug connector	-40 ... 125 °C (-40 ... 257 °F)
Cable, fixed	-40 ... 85 °C (-40 ... 185 °F)
Cable, flexing	-25 ... 85 °C (-13 ... 185 °F)
Pollution degree	3

Mechanical specifications

Plug connector	
Loosening protection	available

Release date: 2023-08-30 Date of issue: 2023-08-30 Filename: 70116668_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Degree of protection		IP68
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter		8.8 mm
Bending radius		> 8 x cable diameter, moving > 4 x cable diameter, fixed
Sheath stripping force		max. 50 N / 300 mm
Sheath color		black (similar to RAL 9005)
Number of cores		6
Core cross section		1.5 mm ²
Cores color		Core 1: white Core 2: brown Core 3: blue Core 4: orange Core 5: green Core 6: black
Core construction		84 x 0.15 mm Ø
Length	L	3 m
Cable code		Li 9Y 11Y 6 x 1,5
Material		
PWIS free		yes
Plug connector		
Body		PA, black
Contact surface		Ni
Flammability		V-2
Cable		
Sheathing		PUR based on polyether
Core insulation		PP
UV resistance		yes
Chemical resistance		good
Oil resistance		yes
Microbial resistance		yes
Hydrolysis resistance		yes

Connection



1)	WH
2)	BN
3)	BU
4)	OG
5)	GN
6)	BK