

Thru-beam sensor

ML29-P/59/102/143-Y807709



- Miniature design
- Ideal for installation in door profiles or frames
- Dark-On switching
- Supplied with connection cable

Thru-beam sensor




Function

The narrow miniature thru-beam sensors are a small and cost-effective solution, fitting in virtually any door frame. The ML29 and ML30 series offer fast, reliable detection at a distance of up to 8.5 m. The sensors are easy to mount on the profile, either using adhesive strips or a screw. A large opening angle ensures problem-free alignment. Several sensors can be mounted in a cross formation to offer multi-beam protection.

Application

- Person detection for automatic doors and gates
- Closing edge protection on sliding and revolving doors
- Threshold monitoring for elevator doors
- Step monitoring for doors on public transport vehicles
- Trigger function for restarting escalators

Dimensions

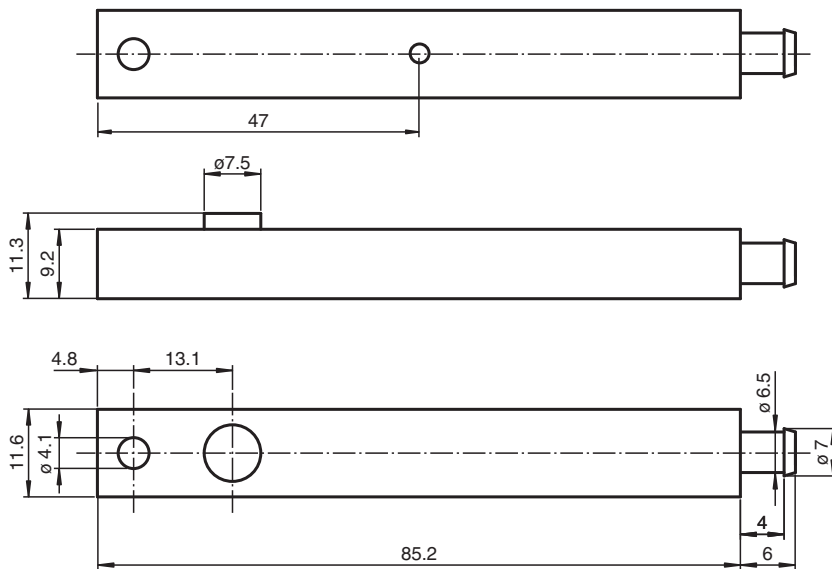

Release date: 2023-11-08 Date of issue: 2023-11-08 Filename: 807709_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com


PF PEPPERL+FUCHS

Technical Data

| General specifications | | |
|--|-------|---|
| Effective detection range | | 0 ... 1.5 m |
| Threshold detection range | | 2.5 m |
| Light source | | IREL |
| Light type | | modulated infrared light , 880 nm |
| Opening angle | | emitter +/- 3 ° |
| Optical face | | lateral |
| Ambient light limit | | 40000 Lux |
| Indicators/operating means | | |
| Function indicator | | LED red in receiver : lights up when receiving the light beam |
| Electrical specifications | | |
| Operating voltage | U_B | 11 ... 30 V DC |
| No-load supply current | I_0 | Emitter: ≤ 20 mA Receiver: ≤ 10 mA |
| Input | | |
| Test input | | emitter deactivation at $+U_B \leq 5$ V DC |
| Output | | |
| Switching type | | dark-on |
| Signal output | | 1 NPN output, short-circuit protected, reverse polarity protected, open collector |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 0.1 A |
| Switching frequency | f | 100 Hz |
| Response time | | 5 ms |
| Conformity | | |
| Product standard | | EN 60947-5-2 |
| Compliance with standards and directives | | |
| Standard conformity | | |
| Standards | | EN 61000-6-2, EN 61000-6-3 |
| Approvals and certificates | | |
| CCC approval | | CCC approval / marking not required for products rated ≤36 V |
| Ambient conditions | | |
| Ambient temperature | | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | | -20 ... 75 °C (-4 ... 167 °F) |
| Relative humidity | | 90 % , noncondensing |
| Mechanical specifications | | |
| Degree of protection | | IP65 |
| Connection | | 4-pin plastic connector, 6.5 mm diameter |
| Material | | |
| Housing | | PMMA , black |
| Optical face | | Plastic pane |
| Mass | | per device 120 g |

Release date: 2023-11-08 Date of issue: 2023-11-08 Filename: 807709_eng.pdf

Connection Assignment

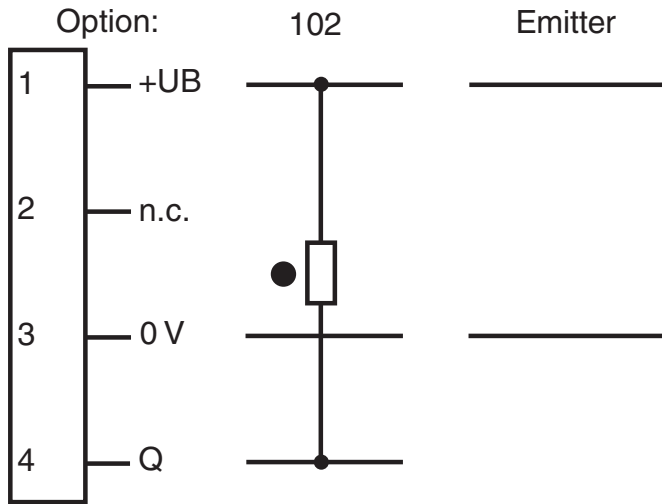

○ = Light on
● = Dark on


Connection Assignment



Wire colors in accordance with EN 60947-5-2

| | | |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue) |
| 4 | BK | (black) |

Assembly

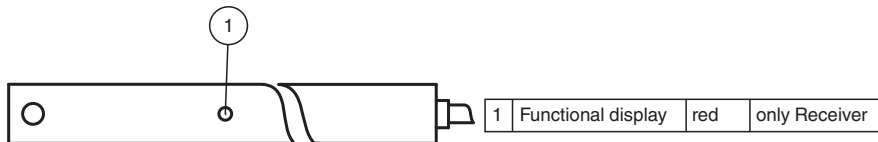

Function Principle

The thru-beam sensor requires a pair of devices for operation, comprising a light transmitter and a light receiver. The emitter and receiver must be arranged in optical alignment with each other. The infrared light from the emitter is detected by the receiver and evaluated.

Release date: 2023-11-08 Date of issue: 2023-11-08 Filename: 807709_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Function

Static detection:

The light beam switch detects persons and objects independently of movement and surface structure for as long as the object breaks the detection beam.

| | | Electronic output |
|----------------------------|-----------------------|--------------------------|
| Light detection /25 | Person in the beam | Inactive |
| | No person in the beam | Active |
| Dark detection /59 | Person in the beam | Active |
| | No person in the beam | Inactive |

Optics:

The relatively wide opening angles enable the light beam switches to be installed quickly, without alignment problems. Even if there is a light distortion of the installation profiles the function is retained.

Testing:

Testing is used to check the function of the light beam switch.

With supply voltage $+U_B < 5\text{ V}$ the emitter device is switched off. This simulates a light beam interruption. By means of this, the function of the light barrier can be tested easily without using a separate test input.

Installation:

Thanks to its small dimensions, the light beam can be fitted in a U-profile or behind a face panel. The hole diameter for both the emitter and the receiver is 8 mm.

Even fixing by means of the adhesive tape contained in the delivery package can be considered.

Release date: 2023-11-08 Date of issue: 2023-11-08 Filename: 807709_eng.pdf