

Female connector, field-attachable

V19X-G-ABG




- Suitable for Gigabit Ethernet
- Field-attachable
- Sturdy metallic housing
- All-round shielding (360°) for full EMC protection
- Insulation displacement connection
- Suitable for wall bushing

Female connector M12 straight X-coded 8-pin, Cat6A, shielded, for cable diameter 5.5 - 9 mm, field-attachable, insulation displacement connection



Dimensions

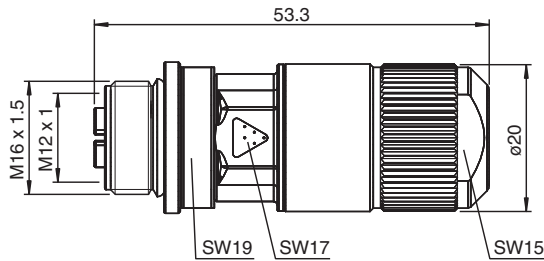

Technical Data

General specifications			
Connector 1			
Connection		socket	
Construction type		M12	
Style		straight	
Locking		screw connection	
Number of pins		8	
Coding		X-coded	
Customization		suitable for wall bushing	
Electrical specifications			
Operating voltage	U _B	max. 50 V AC / 60 V DC	
Operating current	I _B	max. 0.5 A	
Volume resistance		max. 15 mΩ	
Contact resistance		max. 5 MΩ	
Insulation resistance		min. 100 MΩ	
Conformity			

Release date: 2023-05-31 Date of issue: 2023-05-31 Filename: 70131222_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Degree of protection	EN 60529
Fieldbus standard	IEEE 802.3an 10GBASE-T
Transmission technology	suitable for PoE+ Power over Ethernet IEEE 802.3at
Plug connection	connector M12 x 1 : IEC 61076-2-109
Component category	CAT6A (IEC 11801, EN 50173)
Ambient conditions	
Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Pollution degree	3
Mechanical specifications	
Plug connector	
Tightening torque	0.6 Nm
Tool installation	hexagon nut SW = 19 mm
Mating cycles	min. 100
Shielding	via Body
Degree of protection	IP67
Connection	Wire manager included with delivery
Cable	
Sheath diameter	5,5 ... 9 mm
Core cross section	0.1 ... 0.34 mm ² / 27 ... 22 AWG
Mass	48.25 g
Material	
Plug connector	
Screw connection	Zinc diecast, nickel-plated
Body	Zinc diecast, nickel-plated / brass, nickel-plated
Contact surface	Au

Connection Assignment

