


3-D Time-of-Flight sensor

VTE7500-F400-B12-A1500

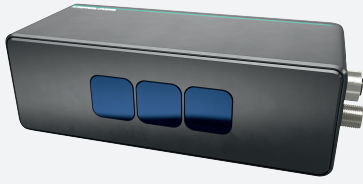


- Resolution 640 x 480 pixel
- Gigabit-Ethernet (GigE) interface
- Simple and fast mounting
- Intuitive and user-friendly operating software ViSolution
- Sturdy metallic housing
- C# API
- DuraBeam technology

The 3-D time-of-flight sensor is based on the principle of measuring time-of-flight of infrared light. This allows raw 3-D data from objects at a range of 400 to 7500 mm to be acquired with an image resolution of 0.3 MP and a frame rate of 30 fps. The sensor features a Gigabit Ethernet interface, intuitive operating software, rugged metal housing, and an API interface. The sensor is especially suitable for dynamic applications with a larger measuring range.



Dimensions

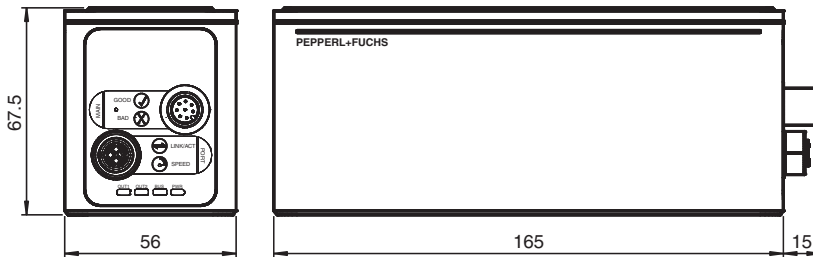

Technical Data

General specifications

Detection range	max. 7500 mm min. 400 mm
Light source	Vertical-cavity surface-emitting laser
Light type	Infrared
Laser nominal ratings	
Laser class	1
Wave length	940 nm
Target velocity	max. 1 m/s
Object reflectivity	> 18 %
Picture detail	dependant of operating distance
Opening angle	47 ° x 35 °
Nominal ratings	
Camera	

Release date: 2023-12-15 Date of issue: 2023-12-15 Filename: 70123993-100000_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Number of pixels	640 x 480 pixels	
Shutter	4 - Phases Global shutter	
Frame rate	30 fps	
Image resolution	0.3 MP	
Functional safety related parameters		
MTTF _d	20 a	
Mission Time (T _M)	10 a	
Diagnostic Coverage (DC)	0 %	
Indicators/operating means		
Operation indicator	4 LEDs (OUT 1, OUT 2, BUS, PWR)	
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 450 mA
Power consumption	P ₀	max. 13 W , Outputs without load
Interface		
Interface type	Ethernet TCP/IP	
Transfer rate	1 GBit/s	
Input		
Control input	1 digital input and External trigger	
Compliance with standards and directives		
Standard conformity		
Noise immunity	EN 61000-6-2:2005	
Emitted interference	EN 61000-6-4:2007/A1:2011	
Degree of protection	EN 60529	
Shock and impact resistance	EN 60068-2-27:2009	
Laser class	IEC 60825-1:2014	
Function and system design		
Measuring principle	Time-of-Flight	
Application	3-D raw data	
Approvals and certificates		
CE conformity	CE	
UKCA conformity	UKCA	
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Ambient conditions		
Operating temperature	-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)	
Relative humidity	< 99 % , noncondensing	
Mechanical specifications		
Degree of protection	IP65/IP67	
Connection	M12 connector, 8-pin , A-coded 8-pin M12 socket , X-coded	
Material		
Housing	metal	
Optical face	Plastic pane	
Installation	M5 screws	
Mass	approx. 800 g	
Tightening torque, fastening screws	max. 2 Nm	
Dimensions		
Height	180 mm	
Width	56 mm	
Depth	67.5 mm	
General information		
Note	INVISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS , LASER ENERGY EXPOSURE NEAR APERTURE MAY CAUSE BURNS	

Release date: 2023-12-15 Date of issue: 2023-12-15 Filename: 70123993-100000_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Connection Assignment

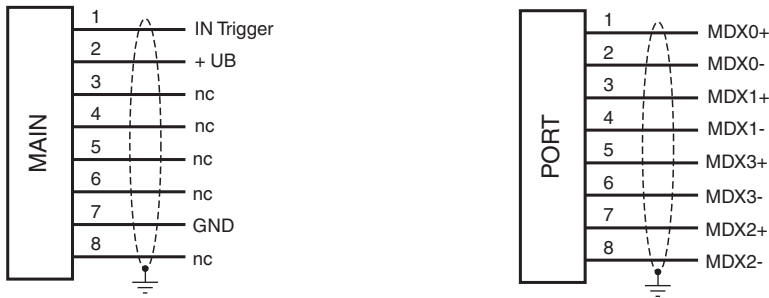

Connection

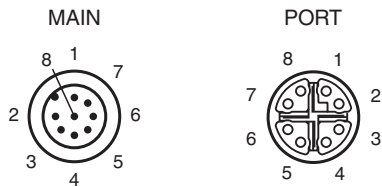

Release date: 2023-12-15 Date of issue: 2023-12-15 Filename: 70123993-100000_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Safety Information



LASERLICHT
LASER LIGHT

LASER KLASSE 1
CLASS 1 LASER PRODUCT

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.