



## Ultrasonic sensor UMB800-18H40-I-2M

- Front of transducer and housing manufactured entirely from stainless steel
- Degree of protection IP68 / IP69K
- Short version: 55 mm
- Program input
- Temperature compensation
- Mounting bracket MH-18H-01 included in delivery


Single head system



### Function

The enclosure and transducer of this ultrasonic sensor form a hermetically sealed unit. Therefore the sensor is suitable for all applications where a very high tightness is required. Since the sensor housing is made exclusively of V4A stainless steel and all seals are made of highly chemical-resistant materials, this sensor is also predestined for use in chemically aggressive environments. For reliable operation, due to the special design of this sensor, solely the enclosed mounting accessories must be used.

### Dimensions

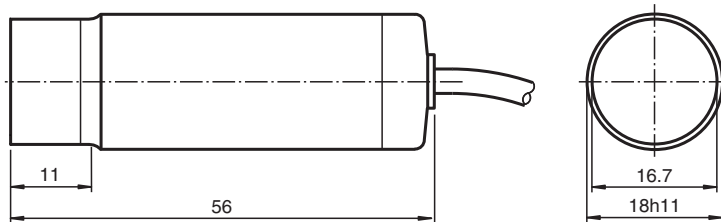

### Technical Data

#### General specifications

Sensing range	70 ... 800 mm
Adjustment range	90 ... 800 mm
Dead band	0 ... 70 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 170 kHz
Response delay	approx. 100 ms

#### Electrical specifications

Operating voltage	$U_B$	10 ... 30 V DC
No-load supply current	$I_0$	≤ 15 mA

#### Input

Release date: 2023-01-17 Date of issue: 2023-01-17 Filename: 70128222\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

## Technical Data

Input type	1 program input operating distance 1: $-U_B \dots +1 \text{ V}$ , operating distance 2: $+6 \text{ V} \dots +U_B$ input impedance: $> 4,7 \text{ k}\Omega$ program pulse: $\geq 1 \text{ s}$	
<b>Output</b>		
Output type	1 analog output $4 \dots 20 \text{ mA}$ , overload-protected	
Resolution	0.4 mm at max. sensing range	
Deviation of the characteristic curve	$\pm 1 \%$ of full-scale value	
Repeat accuracy	$\pm 0.5 \%$ of full-scale value	
Load impedance	0 ... 300 $\Omega$ at $U_B > 10 \text{ V}$ ; 0 ... 500 $\Omega$ at $U_B > 15 \text{ V}$	
Temperature influence	$\pm 1.5 \%$ of full-scale value	
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards	EN IEC 60947-5-2:2020 IEC 60947-5-2:2019 EN 60947-5-7:2003 IEC 60947-5-7:2003	
<b>Approvals and certificates</b>		
CCC approval	CCC approval / marking not required for products rated $\leq 36 \text{ V}$	
<b>Ambient conditions</b>		
Ambient temperature	$-25 \dots 85 \text{ }^\circ\text{C}$ ( $-13 \dots 185 \text{ }^\circ\text{F}$ )	
Storage temperature	$-40 \dots 85 \text{ }^\circ\text{C}$ ( $-40 \dots 185 \text{ }^\circ\text{F}$ )	
<b>Mechanical specifications</b>		
Connection type	cable PUR, 2 m, Polyether based	
Core cross section	4 x 0.19 mm <sup>2</sup>	
Housing diameter	18 mm	
Degree of protection	IP68 / IP69K	
Material		
Housing	Stainless steel 1.4404 / AISI 316L	
Transducer	Stainless steel 1.4435 / AISI 316L	
Seal	Cable seal : TPU, Elastollan 1185 A10	
Mass	90 g	
<b>Factory settings</b>		
Output	evaluation limit A1: 90 mm evaluation limit A2: 800 mm Output mode: rising ramp	


## Connection

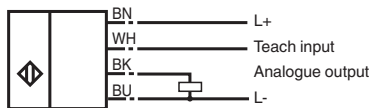


Release date: 2023-01-17 Date of issue: 2023-01-17 Filename: 70128222\_eng.pdf

## Characteristic Curve

### Characteristic response curve

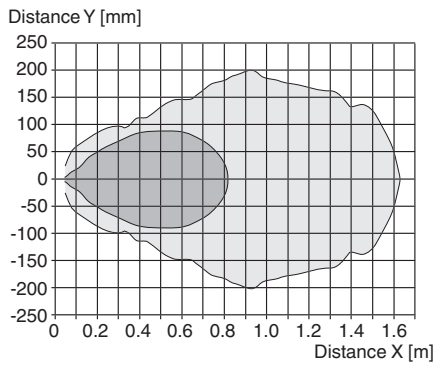

### Programming the evaluation limits

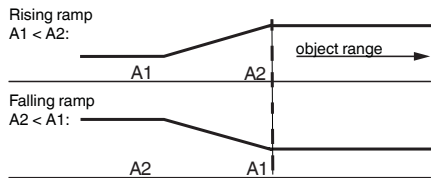

## Accessories

	<b>MH-18H-01</b>	Mounting aid, 18 mm
---	------------------	---------------------

Release date: 2023-01-17 Date of issue: 2023-01-17 Filename: 70128222\_eng.pdf

## Mounting

### Mounting instructions



Comply with the minimum permissible bending radius of 70 mm, if you install the connecting cable!



The mounting accessories included with the sensor must be used in order to ensure reliable operation!

## Additional Information

### Adjustment Possibilities

The sensor is equipped with 1 analog output with 2 programmable limits. The programming of the limits and of the output mode is done using the teach-in input.

### Further Documentation

For information on programming and synchronisation you may refer to the commissioning instruction.