


# Connection cable

## V94-G-YE3M-STOOW-V94-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 4-pin

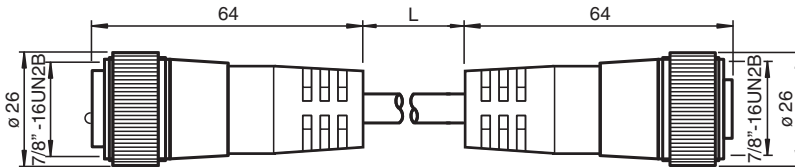

### Technical Data

#### General specifications

Number of pins	4
Connection 1	socket
Construction type 1	straight
Threading 1	7/8 inch
Connection 2	plug
Construction type 2	straight
Threading 2	7/8 inch

#### Electrical specifications

Operating voltage	$U_B$	max. 600 V
Operating current	$I_B$	10 A
Volume resistance		< 5 m $\Omega$

#### Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

#### Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------

#### Mechanical specifications

Degree of protection	IP67
Material	
Contacts	Cu alloy gold plated
Body	PVC, yellow
Cable	PVC
Slotted nut	nickel-plated brass
Core insulation	PVC
Cable	fine-strand, flexible

Release date: 2020-12-11 Date of issue: 2020-12-11 Filename: 70119786\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

### Technical Data

Sheath diameter	Ø 9.9 mm	
Bending radius	10 x cable diameter	
Color	yellow	
Cores	4 x 1.5 mm <sup>2</sup> (16 AWG)	
Length	L	3 m
Note	STOOW UL Standard	

### Connection



Release date: 2020-12-11 Date of issue: 2020-12-11 Filename: 70119786\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com