


Connection cable

ICZ-AIDA1-V45-5M-PUR-V45-G




- CAT5 cable
- Hard-wearing PUR cable
- Up to 100 MHz

Connecting cable RJ-45 to RJ-45, PUR cable 4-pole, CAT5e



Dimensions

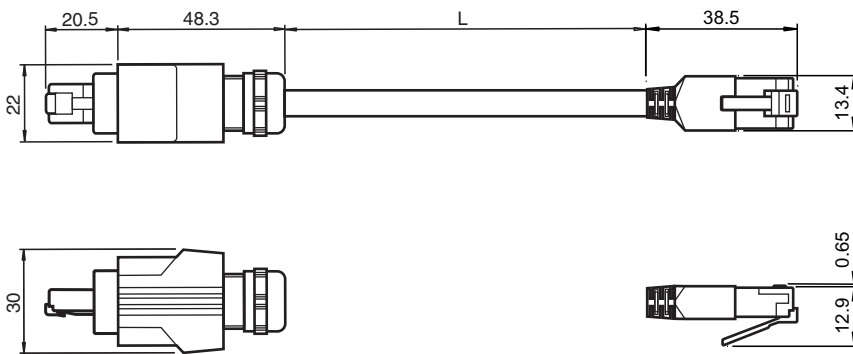

Technical Data

General specifications

Number of pins 4

Electrical specifications

Operating voltage U_B max. 50 V

Rated current I_r max. 500 mA

Compliance with standards and directives

Standard conformity

Standards CAT5 (IEC 11801:2002) , CAT5e (TIA 568B:2001)

Ambient conditions

Ambient temperature -25 ... 60 °C (-13 ... 140 °F)

Mechanical specifications

Degree of protection IP65/IP67

Connection Ethernet: RJ-45 , Category 5 , up to 100 MHz

Material

Contacts CuZn

Contact surface Au

Housing Zinc die-casting, nickel-plated

Release date: 2020-07-14 Date of issue: 2020-07-14 Filename: 240292_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Body	Zinc die-casting, nickel-plated		
Cable		PUR	
Cable			
Sheath diameter		5.8 mm	
Color		water blue (RAL 5021)	
Cores		2 x 2 x 26 AWG	
Length	L	5 m	

Connection

