

# Connection cable


## V95-G-YE20M-STOOW-V95-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 5-pin



### Dimensions

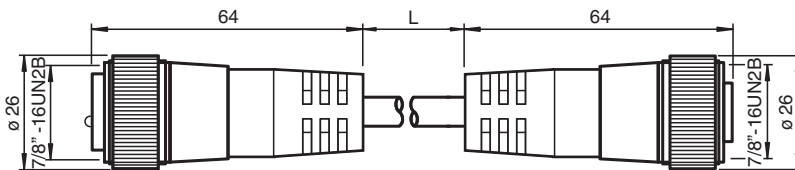

### Technical Data

General specifications		
Number of pins		5
Connection 1		socket
Construction type 1		straight
Threading 1		7/8 inch
Connection 2		plug
Construction type 2		straight
Threading 2		7/8 inch
Electrical specifications		
Operating voltage	$U_B$	max. 600 V
Test voltage		1500 V
Operating current	$I_B$	8 A
Volume resistance		< 5 m $\Omega$
Approvals and certificates		
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-40 ... 105 °C (-40 ... 221 °F)
Mechanical specifications		
Degree of protection		IP67
Material		
Contacts		Cu alloy gold plated
Body		PVC, yellow
Cable		PVC

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119799\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

### Technical Data

Slotted nut	nickel-plated brass	
Core insulation		PVC
Cable	fine-strand, flexible	
Sheath diameter		Ø 9.9 mm
Bending radius	10 x cable diameter	
Color	yellow	
Cores	5 x 1.5 mm <sup>2</sup> (16 AWG)	
Length	L	20 m
Note	STOOW UL Standard	

### Connection



- 1 ) ..... WH
- 2 ) ..... RD
- 3 ) ..... GN/YE
- 4 ) ..... OR
- 5 ) ..... BK

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119799\_eng.pdf