

Bulk Raw Cable

CBL-PVC-BK-04x034-100M




■ cURus approval

Cable, PVC/PVC, 4-core black, UL approved



Dimensions

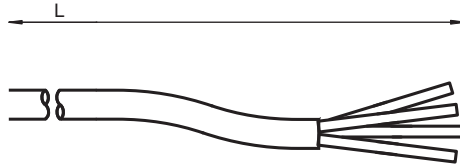

Technical Data

Electrical specifications		
Operating voltage	U_B	max. 300 V AC/DC
Conformity		
Flammability		UL 1581 , IEC 60332-1-2
Approvals and certificates		
UL approval		AWM STYLE 2095 AWM I/II A/B 80°C 300V FT1
Ambient conditions		
Ambient temperature		
Cable, fixed		-40 ... 80 °C (-40 ... 176 °F)
Cable, flexing		-20 ... 80 °C (-4 ... 176 °F)
Pollution degree		3
Mechanical specifications		
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter		4.3 mm ± 0,1 mm
Bending radius		> 15 x cable diameter, moving > 5 x cable diameter, fixed
Sheath stripping force		max. 50 N / 300 mm

Release date: 2023-02-20 Date of issue: 2023-02-20 Filename: 243715_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS











Technical Data

Sheath color		black (similar to RAL 9005)
Number of cores		4
Core cross section		0.34 mm ²
Cores color		Core 1: brown Core 2: white Core 3: blue Core 4: black
Core construction		19 x 0.15 mm Ø
Length	L	100 m
Cable code		Li YY 4 x 0,34
Material		
Cable		
Sheathing		PVC
Core insulation		PVC
Flammability		FT1

Connection Assignment

_____	BN
_____	WH
_____	BU
_____	BK

Accessories

	V1-WV2A	Female connector, field-attachable
	V1S-G-Q3	Field-attachable male QUICKON-ONE connector
	V1-G-Q2	Field-attachable female QUICKON-ONE connector
	V1S-G-Q2	Field-attachable male QUICKON-ONE connector
	V1-G-BK	Female connector M12 straight A-coded 4-pin, for cable diameter 4 - 6 mm, field-attachable
	V1-W-BK	Female connector M12 angled A-coded 4-pin, for cable diameter 4 - 6 mm, field-attachable
	V1S-G-BK	Male connector M12 straight A-coded 4-pin, for cable diameter 4 - 6 mm, field-attachable
	V1S-W-BK	Male connector M12 angled A-coded 4-pin, for cable diameter 4 - 6 mm, field-attachable
	V31-WM-MQ	Female cordset single-ended, M8, 4-pin, field attachable
	V31-WM	Female cordset single-ended, M8, 4-pin, field attachable

Release date: 2023-02-20 Date of issue: 2023-02-20 Filename: 243715_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com









USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Accessories

	V31S-WM	Field-attachable male connector, M8, 4-pin
	V1S-GV4A	Male connector, field-attachable
	V1-W-SC	Female connector M12 angled A-coded 4-pin, for cable diameter 4 - 8 mm, field-attachable, cage spring connection
	V1S-W-SC	Male connector M12 angled A-coded 4-pin, for cable diameter 4 - 8 mm, field-attachable, cage spring connection
	V31-GM-Q4	Female cordset single-ended, M8, 4-pin, field attachable
	V31S-GM-Q4	Field-attachable male connector, M8, 4-pin
	V31S-GM	Male connector, field-attachable
	V31-GM	Female cordset single-ended, M8, 4-pin, field attachable