

AS-Interface end seal

VAZ-FK-ED3



- Protection class improvement if there are no AS-Interface flat cables passing
- Installation without tools

AS-Interface end seal for flat cable

Technical Data

Ambient conditions

Ambient temperature	-25 ... 50 °C (-13 ... 122 °F)
Storage temperature	-25 ... 50 °C (-13 ... 122 °F)

Mechanical specifications

Degree of protection	IP54
Material	PVC
Seal	Filling with Renolit G 2000 grease for sealing the open flat cable ends
Note	Grease may leak from the end seal

General information

Scope of delivery	End seal packaging unit 20-piece
-------------------	----------------------------------

Release date: 2023-01-10 Date of issue: 2023-01-10 Filename: 264957_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Application

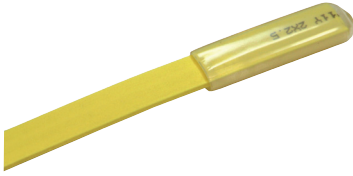

Release date: 2023-01-10 Date of issue: 2023-01-10 Filename: 264957_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**