

# Flexible metal conduit

## MEC-VIM6-V4A-9.5




- Protection against contamination and damage
- Stainless steel version

Flexible metal conduit 9.5 m for VIM6 vibration sensors



### Dimensions

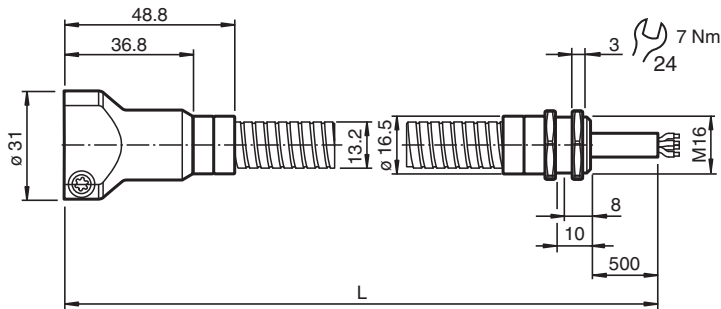

### Technical Data

General specifications	
Suitable components	VIM6* vibration sensors
Ambient conditions	
Ambient temperature	-40 ... 125 °C (-40 ... 257 °F)
Mechanical specifications	
Cable gland	
Thread type	metric
Thread size	M16 x 1.5
Height	31 mm
Width	31 mm
Length	L 9.5 m
Material	
Cable gland	Stainless steel 1.4404 / AISI 316L
Flexible metal conduit	Stainless steel 1.4404 / AISI 316L
Fastener	Stainless steel 1.4401 / AISI 316
Mass	1500 g

Release date: 2022-11-21 Date of issue: 2022-11-21 Filename: 70146291\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS