

Triangulation sensor (BGS)

OBT300-18GM60-E4



- Strong metallic housing in cylindrical shape M18 x 1
- Adjustable background suppression
- Not sensitive to ambient light
- Degree of protection IP67
- High operating distance


Triangulation sensor with background suppression



Function

The optical sensors of this series have an M18 threaded housing that is optionally available in plastic or metal. The sensors are robust and versatile. Focusing on the essential requirements simplifies selection and commissioning, saving time and costs.

Dimensions

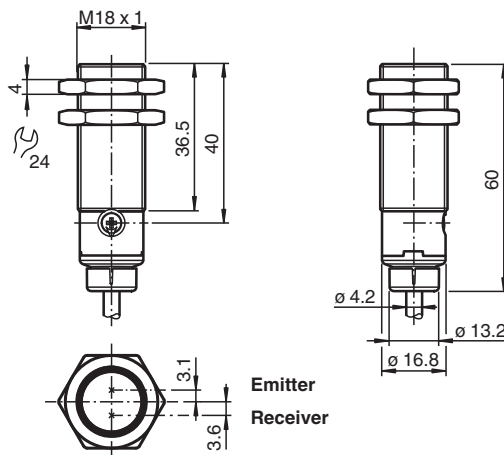

Technical Data

General specifications

| | |
|-----------------------------------|---|
| Detection range | 10 ... 300 mm |
| Detection range min. | 10 ... 50 mm |
| Detection range max. | 10 ... 300 mm |
| Adjustment range | 50 ... 300 mm |
| Reference target | standard white, 100 mm x 100 mm |
| Light source | LED |
| Light type | modulated visible red light |
| Black-white difference (6 %/90 %) | < 40 % at 300 mm |
| Diameter of the light spot | approx. 16 mm at detection range 300 mm |
| Opening angle | approx. 2 ° |
| Optical face | frontal |

Release date: 2022-03-24 Date of issue: 2022-03-24 Filename: 70113328-100132_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

| | | |
|---|----------------|---|
| Ambient light limit | | EN 60947-5-2 100000 Lux |
| Hysteresis | H | < 4 % |
| Functional safety related parameters | | |
| MTTF _d | | 1058 a |
| Mission Time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| Indicators/operating means | | |
| Operation indicator | | LED green: on - power on flashing (4 Hz) - short circuit |
| Function indicator | | LED yellow: constantly on - object detected constantly off - object not detected |
| Control elements | | sensitivity adjustment |
| Control elements | | light/dark on electrically switchable |
| Electrical specifications | | |
| Operating voltage | U _B | 10 ... 30 V DC |
| Ripple | | max. 10 % |
| No-load supply current | I ₀ | < 25 mA |
| Protection class | | III |
| Output | | |
| Switching type | | The switching type of the sensor is adjustable. The default setting is: Q - Pin4: NPN output / light-on L/D-On - WH: Low-active input |
| Signal output | | 1 NPN output, short-circuit protected, reverse polarity protected, open collector |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 100 mA , resistive load |
| Voltage drop | U _d | ≤ 2 V DC |
| Switching frequency | f | 500 Hz |
| Response time | | ≤ 1 ms |
| Conformity | | |
| Product standard | | EN 60947-5-2 |
| Approvals and certificates | | |
| UL approval | | E87056 , cULus Listed , class 2 power supply , type rating 1 |
| Ambient conditions | | |
| Ambient temperature | | -40 ... 60 °C (-40 ... 140 °F) |
| Storage temperature | | -40 ... 70 °C (-40 ... 158 °F) |
| Mechanical specifications | | |
| Degree of protection | | IP67 |
| Connection | | 2 m fixed cable |
| Material | | |
| Housing | | brass, nickel-plated |
| Optical face | | PMMA |
| Cable | | PVC |
| Mass | | approx. 70 g |

Connection

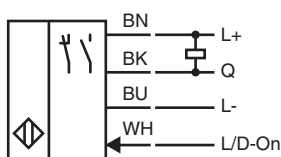

Release date: 2022-03-24 Date of issue: 2022-03-24 Filename: 70113328-100132_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com



PF PEPPERL+FUCHS

Indication

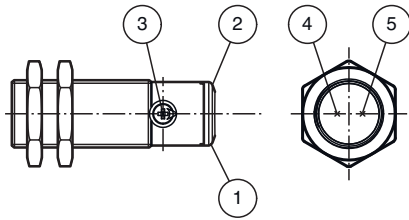



| | | |
|---|------------------------|--------|
| 1 | Operating display | green |
| 2 | Signal display | yellow |
| 3 | Sensitivity adjustment | |
| 4 | Emitter | |
| 5 | Receiver | |

Characteristic Curve

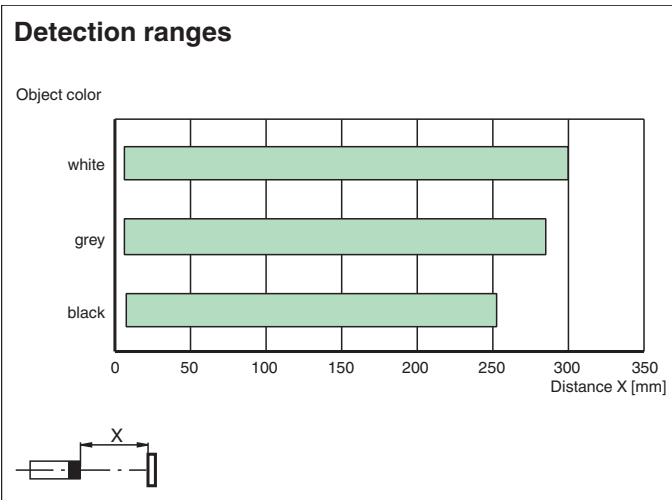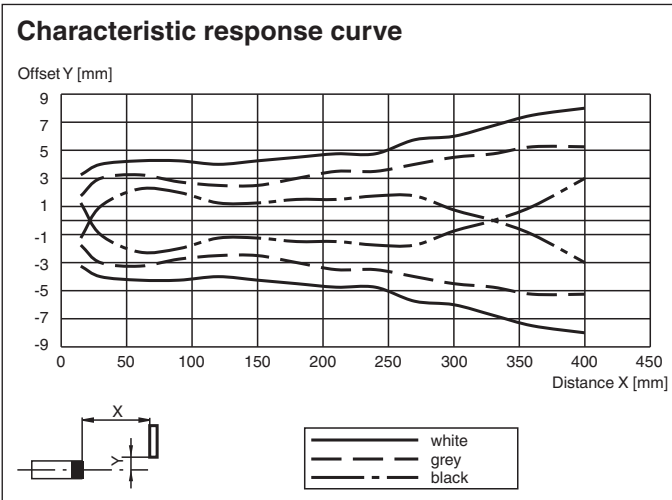





Release date: 2022-03-24 Date of issue: 2022-03-24 Filename: 70113328-100132_eng.pdf

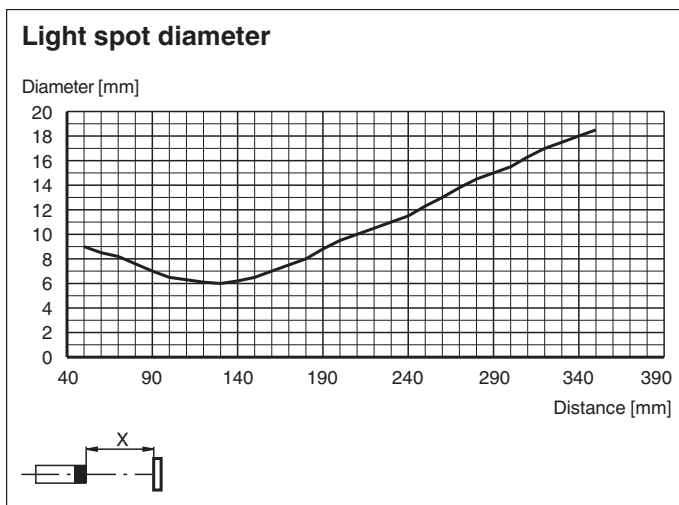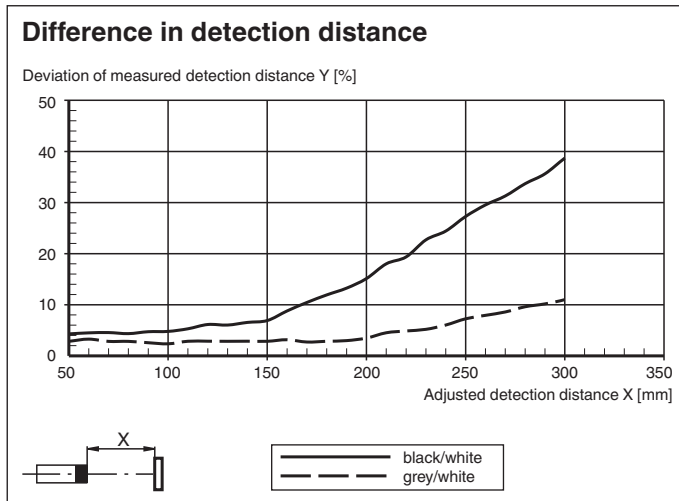Characteristic Curve



Accessories

| | | |
|---|-----------------|---|
|  | BF 18 | Mounting flange, 18 mm |
|  | CPZ18B03 | Mounting Bracket with swivel nut |
|  | BF 18-F | Plastic mounting adapter, 18 mm |
|  | BF 5-30 | Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm |

Release date: 2022-03-24 Date of issue: 2022-03-24 Filename: 70113328-100132_eng.pdf