




Retroreflective sensor

ML17-54/59/103/115-Y909484




- Compact, versatile housing
- 360° high visibility LEDs
- Basic version with single output stage
- Tamper-proof version with no adjustments
- 2 m cable length
- Amp connector

Retroreflective sensor with polarization filter



Dimensions

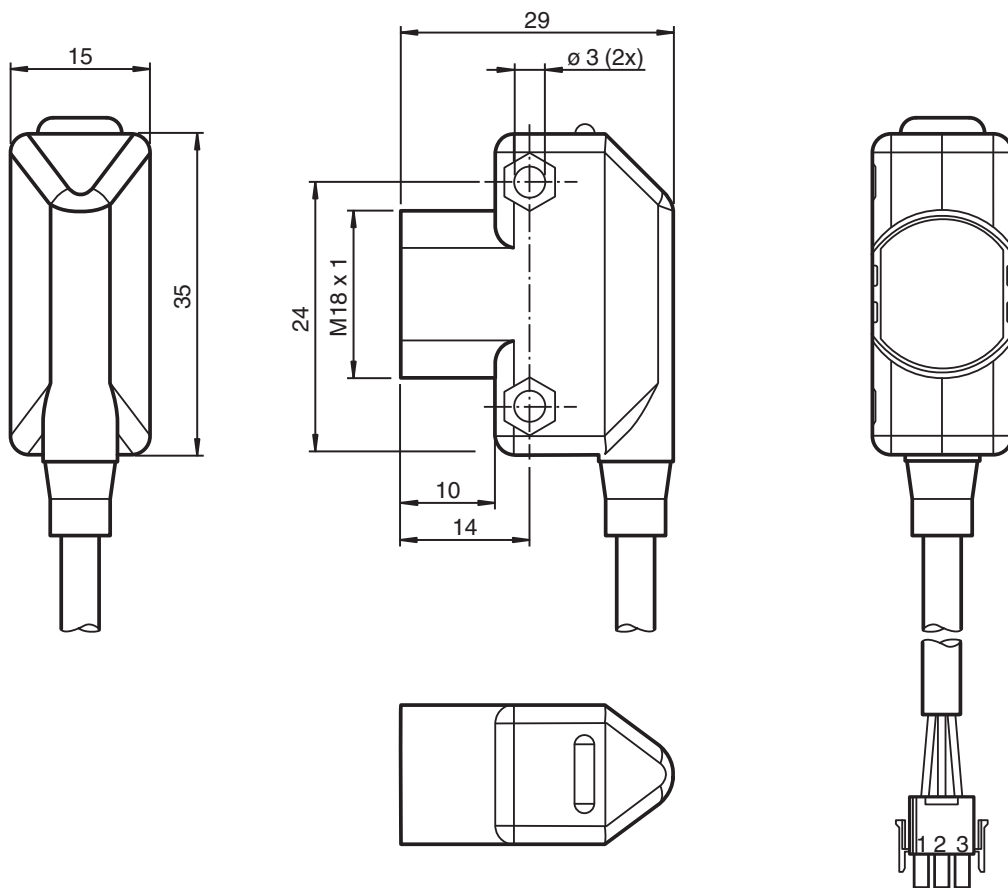

Technical Data

General specifications

Effective detection range	0 ... 3.5 m
Reflector distance	50 ... 3500 mm
Threshold detection range	5 m
Reference target	FE-RR1 reflector

Release date: 2023-04-05 Date of issue: 2023-04-05 Filename: 909484_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS


Technical Data

Light source	LED	
Light type	modulated visible red light , 626 nm	
Polarization filter	yes	
Ambient light limit	≤ 10000 Lux	
Indicators/operating means		
Operation indicator	LED green	
Function indicator	LED yellow, lights up with receiver lit	
Electrical specifications		
Operating voltage	U_B	10 ... 30 V DC , class 2
Ripple	max. 10 %	
No-load supply current	I_0	< 25 mA
Operating current	I_B	100 mA max per output
Time delay before availability	t_v	≤ 200 ms
Output		
Switching type	dark-on	
Signal output	1 PNP, short-circuit protected, reverse polarity protected	
Switching voltage	max. 30 V DC	
Switching current	max. 100 mA	
Voltage drop	U_d	≤ 2.5 V DC
Switching frequency	f	500 Hz
Response time	≤ 1 ms	
Conformity		
Product standard	EN 60947-5-2	
Approvals and certificates		
UL approval	cULus	
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Ambient conditions		
Ambient temperature	-20 ... 55 °C (-4 ... 131 °F)	
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)	
Mechanical specifications		
Housing width	15 mm	
Housing height	34.5 mm	
Degree of protection	IP67	
Connection	2 m fixed cable with 3-pin AMP connector	
Material		
Housing	ABS	
Optical face	Acrylic	
Cable	PVC	
Mass	approx. 40 g	

Connection




Connection Assignment



Wire colors in accordance with EN 60947-5-2


1	WH	(white)
2	BN	(brown)
3	BU	(blue)

Indication

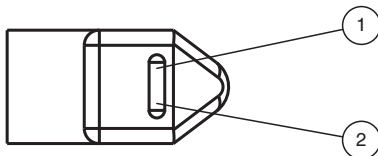


1	Signal display	yellow
2	Operating display	green

Characteristic Curve

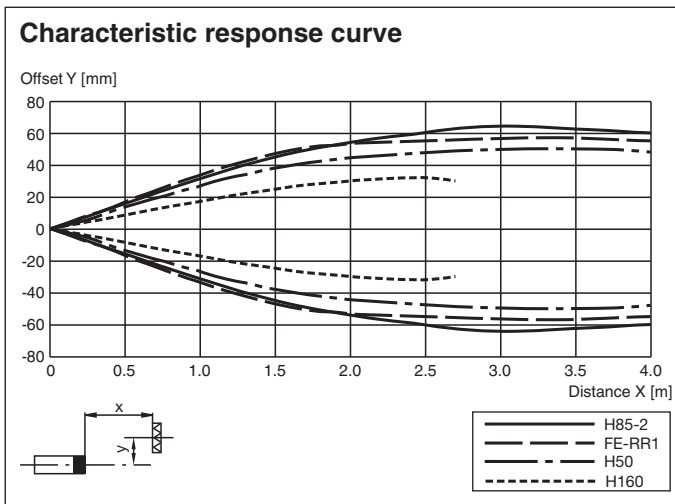



Release date: 2023-04-05 Date of issue: 2023-04-05 Filename: 909484_eng.pdf

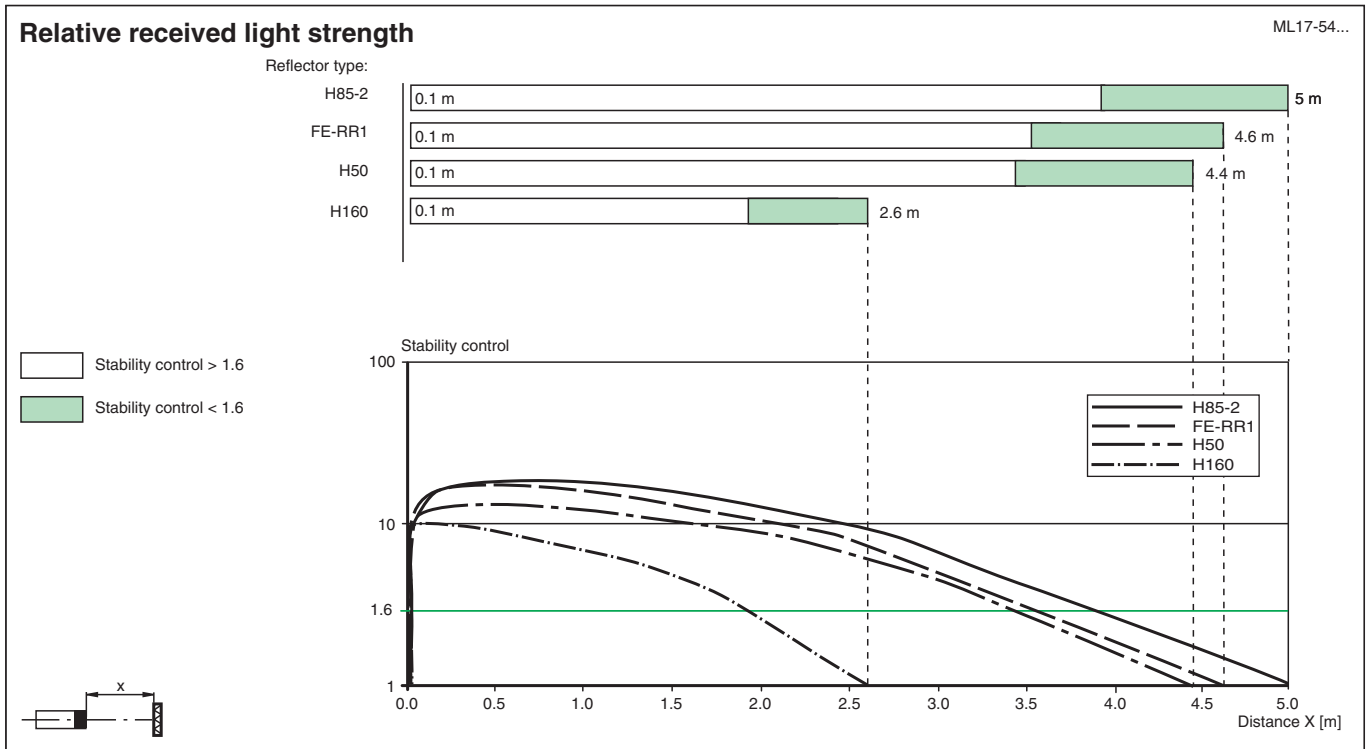Characteristic Curve



Accessories

	OMH-ML17	Mounting bracket
	OMH-ML17-1	Mounting bracket

Release date: 2023-04-05 Date of issue: 2023-04-05 Filename: 909484_eng.pdf