

Terminal resistor

ICZ-TR-V1-130R




- For CC-Link dedicated high-performance cable
- Immunity to vibration
- M12 round connection for BUS (A-coded)

Terminal resistor for CC-Link



Dimensions

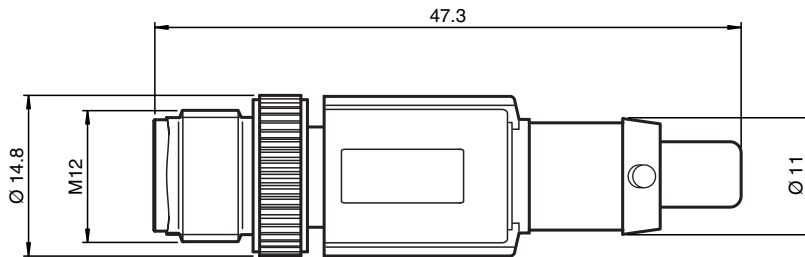

Technical Data

General specifications

Number of pins 4

Electrical specifications

Rated voltage U_r 24 V
Rated current I_r 20 mA at 40 °C
Resistor $R = 130 \Omega$

Directive conformity

RoHS
Directive 2011/65/EU (RoHS) IEC/EN 63000

Ambient conditions

Release date: 2022-05-19 Date of issue: 2022-05-19 Filename: 226899_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F)
Mechanical specifications	
Degree of protection	IP65 / IP67/ IP69K
Connection	4-pin M12 connector, for CC-Link
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, black

Connection



1 = NC
 2 = DB
 3 = NC
 4 = DA