

Connection cable


V95-G-YE10M-STOOW-V95-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 5-pin



Dimensions

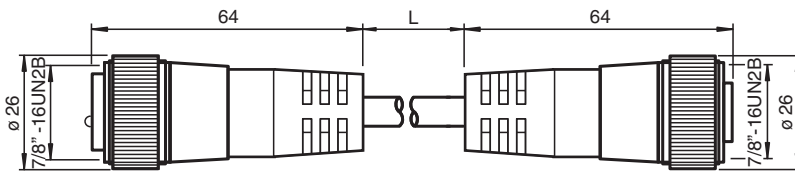

Technical Data

General specifications		
Number of pins		5
Connection 1		socket
Construction type 1		straight
Threading 1		7/8 inch
Connection 2		plug
Construction type 2		straight
Threading 2		7/8 inch
Electrical specifications		
Operating voltage	U_B	max. 600 V
Test voltage		1500 V
Operating current	I_B	8 A
Volume resistance		< 5 mΩ
Approvals and certificates		
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-40 ... 105 °C (-40 ... 221 °F)
Mechanical specifications		
Degree of protection		IP67
Material		
Contacts		Cu alloy gold plated
Body		PVC, yellow
Cable		PVC

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119797_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Slotted nut	nickel-plated brass	
Core insulation		PVC
Cable	fine-strand, flexible	
Sheath diameter		Ø 9.9 mm
Bending radius	10 x cable diameter	
Color	yellow	
Cores	5 x 1.5 mm ² (16 AWG)	
Length	L	10 m
Note	STOOW UL Standard	

Connection



- 1) WH
- 2) RD
- 3) GN/YE
- 4) OR
- 5) BK

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119797_eng.pdf