


Connector ICZ-AIDA2-V45



Plug connector for RJ-45



Dimensions

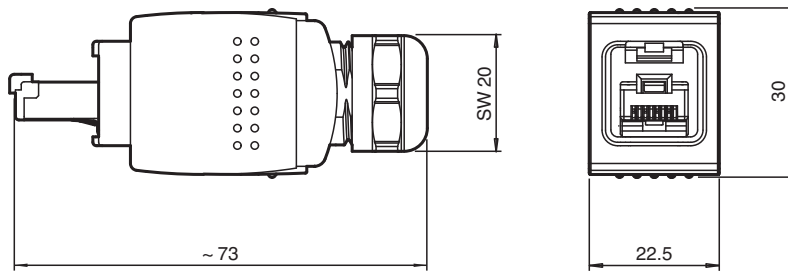

Technical Data

General specifications			
Number of pins			4
Electrical specifications			
Rated current	I_r		1.5 A
Nominal voltage			60 V DC
Ambient conditions			
Ambient temperature			-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications			
Degree of protection			IP65/IP67
Connection			RJ-45
Material			
Housing			Zinc diecast, nickel-plated
Cable			
Sheath diameter			4.0 mm ... 11.0 mm
Core diameter			AWG 27-22 (stranded) AWG 24-22 (solid) 1.6 mm

Release date: 2021-02-04 Date of issue: 2021-02-04 Filename: 250780_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Accessories

	CBL-PUR-E1S-GN-04x034-100M	Cable, PUR/PP, 4-core green, Cat5e, shielded, UL approved, drag chain suitable
---	-----------------------------------	--

Release date: 2021-02-04 Date of issue: 2021-02-04 Filename: 250780_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com **PEPPERL+FUCHS**