


## Male receptacle M16-V95-G-S-.15M

- 22 AWG. Wire (.33 mm<sup>2</sup>)
- Front Mountable
- 7/8" UN2/M16 Threads

Male receptacle, 7/8 inch UN2 /M16, 5-pin



### Dimensions

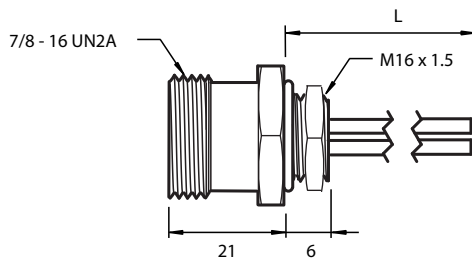

### Technical Data

General specifications		
Number of pins		5
Construction type		straight
Connection 1		plug
Threading 1		7/8 inch
Electrical specifications		
Operating voltage	U <sub>B</sub>	max. 300 V
Operating current	I <sub>B</sub>	max. 4 A
Approvals and certificates		
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-40 ... 105 °C (-40 ... 221 °F)
Mechanical specifications		
Degree of protection		IP69
Connection		7/8 inch-16 UN 2 A
Material		clear anodized aluminum
Contacts		copper alloy gold plated

Release date: 2023-08-02 Date of issue: 2023-08-02 Filename: 909308\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

### Technical Data

Sleeve connector		yellow PVC
Seal		O-ring: BUNA-N
Cable		
Cores		5 x 0.34 mm <sup>2</sup> / 22 AWG
Length	L	0.15 m
Note		M16 x 1.5 installation thread

### Connection Assignment



- 1 ————— WH
- 2 ————— RD
- 3 ————— GN/YE
- 4 ————— OR
- 5 ————— BK