

Cable connector, Ethernet

V1SD-W-GN5M-PUR-E2S




- Hard-wearing PUR cable
- Industrial Ethernet
- D coding for Ethernet
- CAT5/CAT5e cable
- Degree of protection IP68 / IP69
- Free of paint wetting interfering substances
- UL listed for USA and Canada
- Halogen-free
- Specific design protects against loosening and inaccurate installation

Ethernet bus cable male cordset single-ended M12 angled D-coded 4-pin, PUR cable green, Cat5e, shielded, UL approved



Dimensions

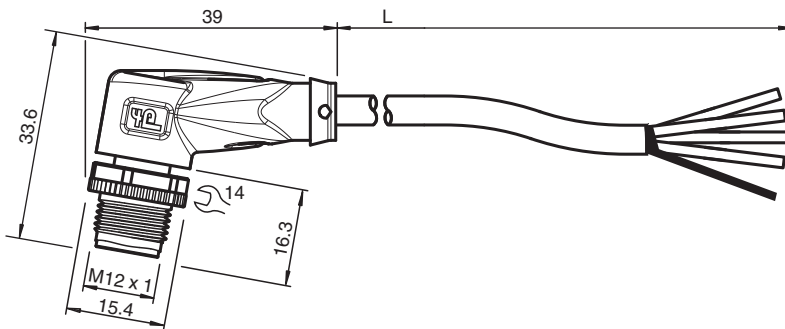

Technical Data

| General specifications | | |
|---------------------------|-------|------------------------|
| Connector 1 | | |
| Connection | | plug |
| Construction type | | M12 |
| Style | | angled |
| Locking | | screw connection |
| Number of pins | | 4 |
| Coding | | D-coded |
| Connector 2 | | |
| Connection | | cable end |
| Electrical specifications | | |
| Operating voltage | U_B | max. 48 V AC / 60 V DC |
| Rated current | I_r | 2 A |
| Conformity | | |
| Degree of protection | | EN 60529 |
| Fieldbus standard | | Ethernet 100 Mbit/s |

Release date: 2023-05-04 Date of issue: 2023-05-04 Filename: 70165004_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

| | | |
|-----------------------------------|---|--|
| Plug connection | | connector M12 x 1 : IEC 61076-2-101 |
| Component category | | CAT5 (IEC 11801) , CAT5e (IEC 61156-6) |
| Flammability | | IEC 60332-1-2 / UL 1581 FT1 |
| Halogen-free | | IEC 60754-1 |
| Chemical resistance | | DIN EN 60811-2-1 |
| Microbial resistance | | DIN EN 50525-2-21 / DIN VDE 0282-10 |
| Oil resistance | | DIN EN 60811-2-1 |
| Approvals and certificates | | |
| UL approval | | AWM STYLE 21161 AWM I/II A/B 80°C 300V FT1 (cable) |
| UL File Number | | E231213 |
| Ambient conditions | | |
| Ambient temperature | | |
| Plug connector | | -40 ... 90 °C (-40 ... 194 °F) |
| Cable, fixed | | -40 ... 80 °C (-40 ... 176 °F) |
| Cable, flexing | | -30 ... 70 °C (-22 ... 158 °F) |
| Mechanical specifications | | |
| Plug connector | | |
| Tightening torque | | 0.6 Nm |
| Loosening protection | | available |
| Tool installation | | straight knurling and hexagon nut SW = 14 mm |
| Mating cycles | | min. 100 |
| Shielding | | shield connected to screw connection |
| Degree of protection | | IP68 / IP69 |
| Cable | | according to IEC/EN 60228 (DIN VDE 0295) class 5 |
| Sheath diameter | | 4.8 mm |
| Bending radius | | > 12 x cable diameter, moving > 6 x cable diameter, fixed |
| Sheath stripping force | | max. 50 N / 100 mm |
| Sheath color | | green (similar to RAL 6018) |
| Number of cores | | 4 |
| Core cross section | | 0.15 mm ² / 26 AWG |
| Cores color | | Core 1: white/orange Core 2: white/green Core 3: orange Core 4: green |
| Core construction | | 19 x 0.1 mm Ø twisted quad |
| Shield | | aluminum-lined polyester foil Tinned copper braiding, 85 % coverage |
| Length | L | 5 m |
| Cable code | | Li 9Y 11YM 4 x 0,15 |
| Drag chain suitability | | |
| Motion velocity | | max. 3 m/s |
| Acceleration | | max. 3 m/s ² |
| Material | | |
| PWIS free | | yes |
| Halogen-free | | yes |
| Plug connector | | |
| Screw connection | | Zinc diecast, nickel-plated |
| Body | | TPU, black |
| Contact surface | | Au |
| Flammability | | V-2 |
| Cable | | |
| Sheathing | | PUR based on polyether |
| Core insulation | | PP |



Release date: 2023-05-04 Date of issue: 2023-05-04 Filename: 70165004_eng.pdf

Technical Data





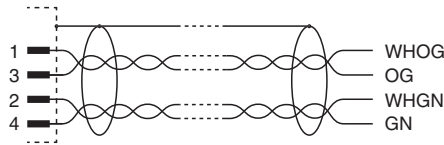


Flammability

FT1

Connection Assignment



Accessories

| | | |
|---|------------------------------|--|
|  | MH V1-SCREWDRIVER | Torque screwdriver (0.6 Nm) |
|  | MH V1-BIT M12 | plug-in cap M12 |
|  | V1/V3-LABELHOLDER | Label holder |
|  | V1/V3-LABEL | Label plate |
|  | MH V1-Holder | Modular universal holder for M12 connectors |
|  | V1-CLIP | Unlocking protector for M12 connector |
|  | V1-MARKING-RING-COLOR | Marking rings for M12 connectors, various colors |