

# Pressure Sensor with IO-Link

## FX5Q101

Part Number

weFlux<sup>2</sup> InoxSens



- 2 analog outputs: 4 ... 20 mA
- Compact, laser-welded V4A stainless steel housing
- Pressure and temperature measurement with a single sensor

weFlux2 pressure sensors measure the relative pressure of any desired media in closed systems. Pressure acting upon the sensor is converted to an electronic signal. The analog outputs read out the measured pressure and temperature values as 4 to 20 mA signals.



### Technical Data

#### Sensor-specific data

Measuring Range	-1...10 bar
Measurement Type	relative
Maximum overload pressure	20 bar
Bursting pressure	30 bar
Medium	Liquids, gases
Temperature Measurement Range	-40...125 °C
Response time (t90) Temp	< 1 s
Pressure Response Time (t90)	< 10 ms
Temperature Measurement Accuracy	< ± 1 °C
Measuring error (total)	0,5 %
Hysteresis	< ± 0,1 %
Linearity Deviation	< ± 0,2 %
Zero-Point Error	< ± 0,1 %
Repeat Accuracy	< ± 0,1 %
Temperature Coefficient Zero-Point	<± 0,05% /10K
Temperature Coefficient Range	<± 0,05% /10K

#### Environmental conditions

Temperature of medium	-25...125 °C**
Ambient temperature	-25...80 °C
Storage temperature	-25...80 °C
EMC	DIN EN 61326-2-3
Shock resistance per DIN IEC 68-2-27	50 g / 11 ms
Vibration resistance per DIN IEC 60068-2-6	10 g (10...2000 Hz)

#### Electrical Data

Supply Voltage	12...32 V DC
Current Consumption (U <sub>b</sub> = 24 V)	< 15 mA
Analog Outputs	2
Analog Output	4...20 mA Press / Temp
Resolution	> 11 bit
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III

#### Mechanical Data



Sensor element	Ceramic diaphragm
Housing Material	1.4404
Material in contact with media	1.4404; FKM; Ceramic
Degree of Protection	IP65 *
Connection	M12 × 1; 4-pin
Process Connection	G 3/4"; front


#### Safety-relevant Data

MTTFd (EN ISO 13849-1)	1157,11 a
Analog Output	●
Connection Diagram No.	141
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	920

\* Tested by wenglor

\*\* Sensors suitable up to 125 °C media temperature. During installation, please ensure that the sensor housing is adequately cooled by the surroundings.

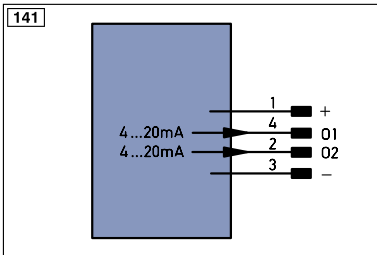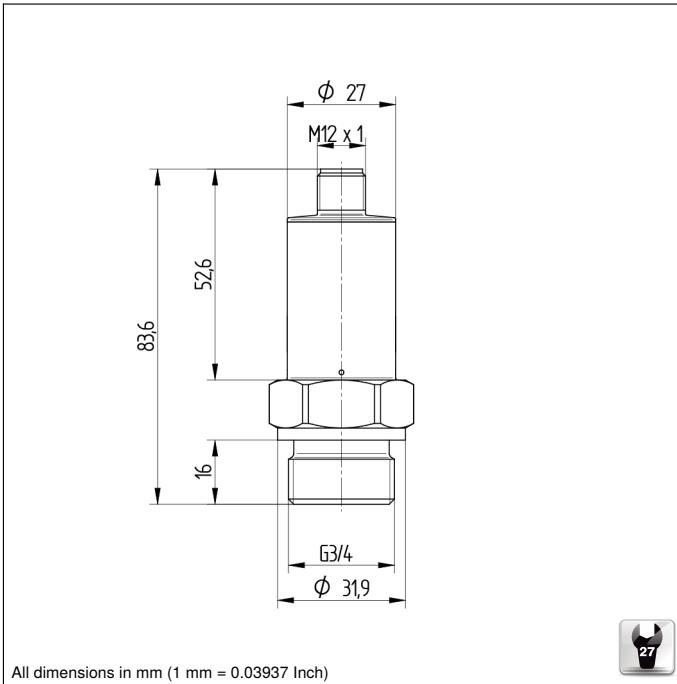

Legend	
+	Supply Voltage +
-	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
$\bar{A}$	Switching Output (NC)
V	Contamination/Error Output (NO)
$\bar{V}$	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
	IO-Link
PoE	Power over Ethernet
IN	Safety Input
OSSD	Safety Output
Signal	Signal Output
Bl..D +/-	Ethernet Gigabit bidirect. data line (A-D)
EN0..RS422	Encoder 0-pulse 0-0 (TTL)
PT	Platinum measuring resistor
nc	not connected
U	Test Input
$\bar{U}$	Test Input inverted
W	Trigger Input
W-	Ground for the Trigger Input
O	Analog Output
O-	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY-	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
$\pm$	Grounding
S <sub>n</sub> R	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
L <sub>a</sub>	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contactur Monitoring
EN <sub>A</sub> RS422	Encoder A/ $\bar{A}$ (TTL)
EN <sub>B</sub> RS422	Encoder B/ $\bar{B}$ (TTL)
EN <sub>A</sub>	Encoder A
EN <sub>B</sub>	Encoder B
A <sub>MIN</sub>	Digital output MIN
A <sub>MAX</sub>	Digital output MAX
A <sub>OK</sub>	Digital output OK
SY <sub>in</sub>	Synchronization In
SY <sub>OUT</sub>	Synchronization OUT
OL <sub>T</sub>	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

