




**Dimensions**

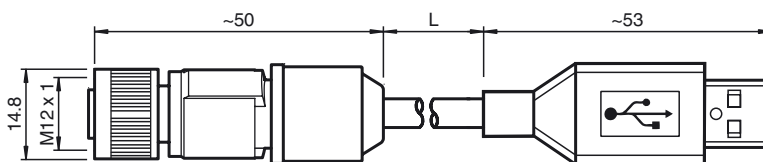

**Model Number**

**V1-G-2M-PVC-USBA**

adapter cable, M12 to USB, 4-pin PVC cable

**Features**

- USB 2.0
- Suitable for 12 MBit/s (full speed)

**Technical data**

**General specifications**

Number of pins 4

**Electrical specifications**

Operating voltage  $U_B$  max. 30 V DC  
 Operating current  $I_B$  max. 100 mA


**Ambient conditions**

Ambient temperature -25 ... 80 °C (-13 ... 176 °F)

**Mechanical specifications**

Degree of protection IP65/IP67  
 Material  
 Cable PVC  
 Slotted nut plastic  
 Cable  
 Sheath diameter  $\varnothing$  3.8 mm  
 Color grey  
 Cores 4 x 0.09 mm<sup>2</sup>  
 Conductor construction 7 x 0.127 mm  $\varnothing$  28AWG/2C  
 Shield grid  
 Length L 2 m

**Electrical connection**

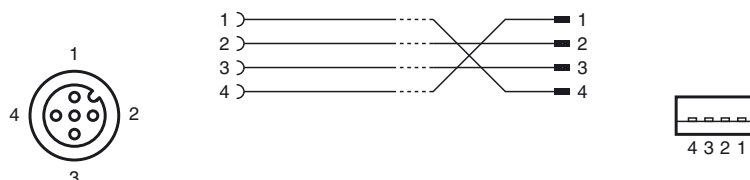

Release date: 2015-06-24 12:03 Date of issue: 2015-06-24 219510\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
 www.pepperl-fuchs.com

USA: +1 330 486 0001  
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
 fa-info@sg.pepperl-fuchs.com