


**Dimensions**

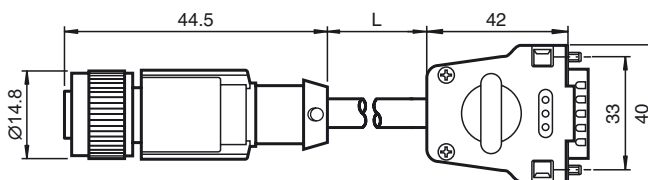

**Model Number**

**V19-G-5M-PUR-ABG-SUBD15**

Connection cable, M12 to SUB-D, PUR cable 8-pin

**Features**

- M12 to Sub-D adapter

**Technical data**

**General specifications**

Number of pins 8

**Electrical specifications**

Operating voltage  $U_B$  max. 30 V AC/DC  
 Operating current  $I_B$  max. 2 A


**Ambient conditions**

Ambient temperature Body: -25 ... 90 °C (-13 ... 194 °F)  
 cable, flexing: -25 ... 80 °C (-13 ... 176 °F)  
 cable, fixed: -40 ... 80 °C (-40 ... 176 °F)

**Mechanical specifications**

Material		
Contacts		CuSn
Contact surface		Au
Body		TPU, green
Cable		PUR
Slotted nut		Diecast zinc
Core insulation		PP
Cable		
Sheath diameter		Ø 5.9 mm
Bending radius		> 10 x cable diameter, moving > 8 x cable diameter, fixed
Color		black
Cores		8 x 0.25 mm <sup>2</sup>
Conductor construction		32 x 0.1 mm Ø
Shield		grid covering 85 %
Length	L	5 m

**Electrical connection**

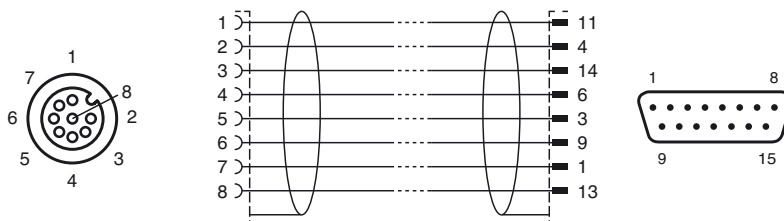

Release date: 2017-03-30 09:39 Date of issue: 2017-03-30 223360\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
 www.pepperl-fuchs.com

USA: +1 330 486 0001  
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
 fa-info@sg.pepperl-fuchs.com