



Model Number


ML29 Kupplungsdose 6m 4polig

Female cordset with 6 m cable for ML29 series sensors

Features

- Special snap-in connector for ML29 series

Dimensions

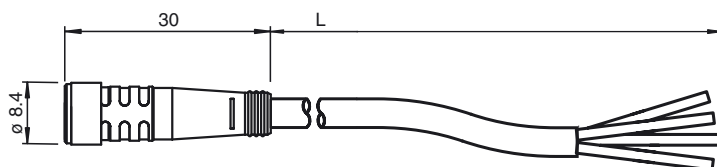

Technical data

General specifications

| | |
|---------------------|-----------|
| Number of pins | 4 |
| Connection 1 | socket |
| Construction type 1 | straight |
| Threading 1 | M8 |
| Connection 2 | cable end |

Electrical specifications

| | | |
|-------------------|-------|---------------|
| Operating voltage | U_B | max. ... 30 V |
| Operating current | | max. 4 A |

Ambient conditions

| | |
|---------------------|--------------------------------|
| Ambient temperature | -30 ... 90 °C (-22 ... 194 °F) |
| Pollution Degree | 3 |

Mechanical specifications

| | |
|----------------------|---|
| Degree of protection | IP67 according to EN 60529 (when properly seated) |
| Material | |
| Body | TPU, blue |
| Cable | PVC |
| Cable | |
| Sheath diameter | Ø 3.5 mm |
| Color | grey |
| Cores | 4 x 0.14 mm ² |
| Length | L 6 m |

Electrical connection



| | | |
|---|-------|----|
| 1 | | BN |
| 2 | | WH |
| 3 | | BU |
| 4 | | BK |