



Model Number


V3-WM-0.5/2.5M-PUR

Spiral cable socket, M8, 3-wire, PUR

Features

- Knurled nut suitable for tool assembly
- Gold-plated and machined contacts
- Suitable for 2-, 3- and 4-wire technology
- Immunity to vibration, with mechanical latching
- Halogen-free

Dimensions

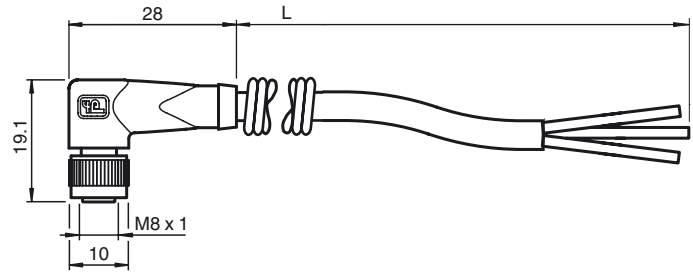

Technical data

General specifications

Number of pins	3
Connection 1	socket
Construction type 1	right angle
Threading 1	M8
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 48 V AC / 60 V DC
Operating current	I_B	max. 4 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	-25 ... 100 °C (-13 ... 212 °F) for temperatures over 80 °C (176 °F) reduced elongation at tear
Pollution degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP68
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	PUR, green
Cable	TPE-U
Slotted nut	Diecast zinc
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	\varnothing 4.2 mm
Color	black
Cores	4 x 0.14 mm ²
Conductor construction	18 x 0.1 mm \varnothing
Length	L 0.5 ... 2.5 m
Flammability	
Contact carrier	94 V-2
Housing	94 V-2

Compliance with standards and directives

Standard conformity	
Specification	connector M8 x 1 : IEC 61076-2-104

Electrical connection

