

Connection cable


V3-WM-E2-BK10M-PUR-U-V3-GM

- Built-in LED, as operating and function indicator
- Suitable for drag chains and abrasion resistant
- Suitable for robotic applications / torsion resistant
- Degree of protection IP67
- Free from substances that impair paint wetting
- Resistant to microbes and hydrolysis
- UV resistant
- cURus approval
- Halogen-free
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Cordset M8 socket angled A-coded LED 3-pin to M8 plug straight A-coded 3-pin, PUR cable black, UL-approved, drag chain suitable, torsion resistant



Dimensions

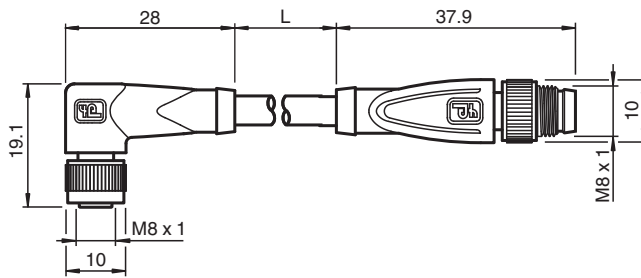

Technical Data

General specifications

Connector 1	
Connection	socket
Construction type	M8
Style	angled
Locking	screw connection
Number of pins	3
Coding	A-coded
Connector 2	
Connection	plug
Construction type	M8
Style	straight
Locking	screw connection
Number of pins	3
Coding	A-coded

Release date: 2021-02-15 Date of issue: 2021-02-15 Filename: 240819-100006_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

UL File Number	E231213		
Indicators/operating means			
LED green	Operating display		
LED yellow	Functional display pin 4		
Electrical specifications			
Operating voltage	U _B	max. 24 V DC -20 % / +25 %	
Operating current	I _B	max. 3 A	
Conformity			
Degree of protection	EN 60529		
Plug connection	connector M8 x 1 : IEC 61076-2-104		
Flammability	UL 1581; DIN EN 60332-2-2		
Halogen-free	IEC 60754-1		
Approvals and certificates			
UL approval	AWM STYLE 20549 AWM I/II A/B 80°C 300V FT2 (cable)		
Ambient conditions			
Ambient temperature			
Plug connector	-40 ... 90 °C (-40 ... 194 °F)		
Cable, fixed	-40 ... 80 °C (-40 ... 176 °F)		
Cable, flexing	-20 ... 80 °C (-4 ... 176 °F)		
Pollution degree	3		
Mechanical specifications			
Plug connector			
Tightening torque	0.4 Nm		
Loosening protection	available		
Tool installation	straight knurling		
Mating cycles	min. 100		
Degree of protection	IP67		
Cable	according to IEC/EN 60228 (DIN VDE 0295) class 6		
Sheath diameter	4.3 mm		
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed		
Sheath stripping force	max. 80 N / 300 mm		
Sheath color	black (similar to RAL 9005)		
Number of cores	3		
Core cross-section	0.34 mm ²		
Cores color	Core 1: brown Core 3: blue Core 4: black		
Core construction	42 x 0.1 mm Ø		
Length	L	10 m	
Cable code	Li 9Y 11Y 3 x 0.34		
Drag chain suitability			
Drag chain cycles	min. 5000000		
Motion velocity	max. 3.3 m/s		
Traverse distance	max. 5 m		
Acceleration	max. 5 m/s ²		
Torsion cycles	min. 1000000		
Torsional stress	± 180 °/m		
Material			
LABS free	yes		
Halogen-free	yes		
Plug connector			
Screw connection	Zinc diecast, nickel-plated		
Body	TPU, transparent/black		

Release date: 2021-02-15 Date of issue: 2021-02-15 Filename: 240819-100006_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Contact surface	Au
Flammability	V-2
Cable	
Sheathing	PUR based on polyether
Core insulation	PP
UV resistance	yes
Chemical resistance	good
Oil resistance	yes
Cooling lubricant resistance	yes
Microbial resistance	yes
Hydrolysis resistance	yes
Flammability	FT2

Connection Assignment



Release date: 2021-02-15 Date of issue: 2021-02-15 Filename: 240819-100006_eng.pdf