


# Sensor adapter

## CP-ADP-SLT-1/4-M12 5pcs

- Suitable for 1/4" flexible coated conduit

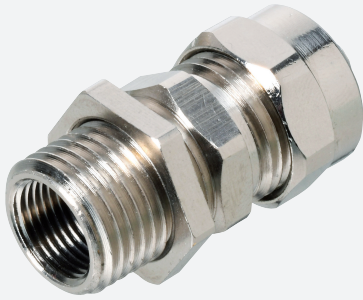


Sensor adapter for M12 sensors and 1/4" flexible coated conduit

### Function

The sensor is screwed into the internal thread of the sensor adapter. The sensor adapter is used in conjunction with a suitable flexible conduit and a suitable cable gland to form a cable protection system for sensors. The purpose of this system is to protect the sensor wiring in harsh environments.

### Dimensions

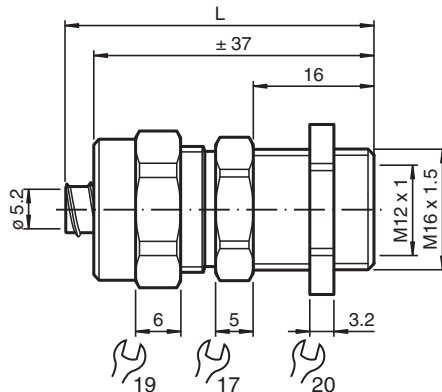

### Technical Data

#### Mechanical specifications

External thread	
Thread type	metric
Thread size	M16 x 1.5
Internal thread	
Thread type	metric
Thread size	M12 x 1
Degree of protection	IP65
Material	
Screwed connection	brass, nickel-plated
Slotted nut	brass
Clamping ring	PVC
Mass	37 g

Release date: 2023-06-13 Date of issue: 2023-06-13 Filename: 307498\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com



 PEPPERL+FUCHS

## Technical Data

### General information

Scope of delivery	5 item(s)
Supplementary information	observe mounting instructions

## Matching System Components

	<b>CP-CGL-SLT-1/4-M12</b> 5pcs	Cable gland M12 for cable diameter 1 ... 5.2 mm and 1/4" flexible coated conduit
	<b>CP-CGL-SLT-1/4-M16</b> 5pcs	Cable gland M16 for cable diameter 1 ... 5.2 mm and 1/4" flexible coated conduit