



## Handheld reader OHV1000-F223-R2

- All common 1-D or 2-D codes can be read
- Dual lens for large read range
- Reading of laser-engraved, etched, or printed codes
- Reads from reflective surfaces
- Programmable with JavaScript
- Audible, tactile, and visual user feedback
- Degree of protection IP54



Handheld reader for reading lasered, punched or printed 1-D and 2-D codes



### Function

The OHV1000 handheld is a compact handheld reader for all common 1-D and 2-D codes applied directly to the surface of a product. For example, the code may have been etched, printed, or laser-engraved on the housing. Special technology to prevent glare allows the device to accurately read codes on highly reflective surfaces. With its patented dual lens and a resolution of 1.2 million pixels, it can read both small and large codes from a wide range of distances. Feedback comes in the form of a visual or audible signal or a vibration. Using the Vision Configurator software, rule sets can be created for formatting read results without the need for extensive programming work. This facilitates integration into ERP systems. Data is transferred via USB or RS-232, depending on which connection cable is selected. With its robust housing and IP54 protection, the handheld reader is ideally suited to heavy-duty industrial use.

## Dimensions

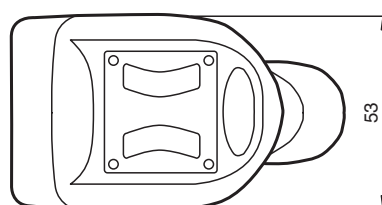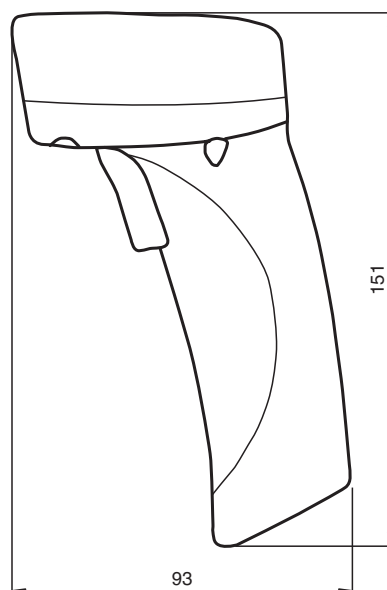

## Technical Data

General specifications	
Light type	Integrated LED lightning (red)
Readable codes	<p><b>1-D Codes:</b> Codabar, Code 11, Code 32, Code 39, Code 93, Code 128, IATA 2 of 5, Interleaved 2 of 5, GS1 DataBar, Hong Kong 2 of 5, Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Pharmacode, Plessey, Straight 2 of 5, Telepen, Trioptic, UPC/EAN/JAN</p> <p><b>Stacked 1-D Codes:</b> GS1 Composite, MicroPDF, PDF417</p> <p><b>2-D Codes:</b> Aztec Code, Code 49, Codablock F, Data Matrix, Han Xin, MaxiCode, Micro QR, QR Code</p> <p><b>Postal Codes:</b> Australian Post, Intelligent Mail, Japan Post, KIX Code, Korea Post, Planet, Postnet, UK Royal Mail, UPU ID-tags</p>
Read distance	0 ... 200 mm depending on the code type and reading mode
Modul size	min. 0.1 mm
Ambient light limit	96890 Lux
Target velocity	Stop
Nominal ratings	
Camera	
Type	CMOS
Number of pixels	1280 x 960
Image recording	real-time , manually triggered
Indicators/operating means	
Function indicator	LED green: Data carrier read
Electrical specifications	
Supply	via cable
Interface	
Physical	USB 2.0 , RS-232

Release date: 2022-10-17 Date of issue: 2022-10-17 Filename: 272204\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group  
 www.pepperl-fuchs.com

 USA: +1 330 486 0001  
 fa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 1111  
 fa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091  
 fa-info@sg.pepperl-fuchs.com


### Technical Data

<b>Ambient conditions</b>	
Ambient temperature	-20 ... 55 °C (-4 ... 131 °F)
Storage temperature	-30 ... 65 °C (-22 ... 149 °F)
Relative humidity	5 ... 95 % non-condensing
Shock and impact resistance	Withstands multiple drops from 1.8 m / 6 ft onto a concrete surface
<b>Mechanical specifications</b>	
Degree of protection	IP54
Connection	System connector for connecting cable
Material	
Housing	plastic
Mass	130 g
Dimensions	93 mm x 53 mm x 151 mm (l x w x h)
<b>General information</b>	
Scope of delivery	Handheld reader


### Connection

Pin	Signal
1	+VIN
2	USB_DM
3	USB_DP
4	RS 232 TX
5	RS 232 RTS
6	RS 232 RX
7	RS 232 CTS
8	External Trigger
9	not connected
10	Ground

### Connection Assignment



### Assembly

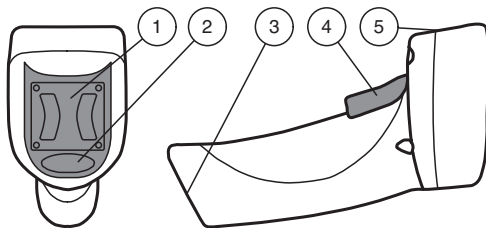

1	Mounting bracket
2	Function indicator
3	10-pin connector socket
4	Trigger button
5	Optics






### Accessories

	<b>Vision Configurator</b>	Operating software for camera-based sensors
	<b>V45-G-2M-PVC-ABG-USB-G</b>	Adapter cable, RJ50 to USB

Release date: 2022-10-17 Date of issue: 2022-10-17 Filename: 272204\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Accessories

	<b>V45-G-2M-PVC-SUBD9</b>	Adapter cable, RJ50 to RS 232
	<b>V50-G-2M-PVC-5V-SUBD25</b>	Adapter cable, RJ-50 to D-Sub 25
	<b>OHV1000-BRACKET</b>	Bracket for OHV1000-F223-R2
	<b>V19S-G-1,7/3M-PVC-V50</b>	Adapter cable, M12 8-pin to RS 232
	<b>OHV-F230-B17</b>	PROFINET Gateway for OHV handheld

Release date: 2022-10-17 Date of issue: 2022-10-17 Filename: 272204\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

