



Sensor adapter

CP-ADP-SLT-5/16-M30 5pcs


- Suitable for 5/16" flexible coated conduit

Sensor adapter for M30 sensors and 5/6" flexible coated conduit

Function

The sensor is screwed into the internal thread of the sensor adapter. The sensor adapter is used in conjunction with a suitable flexible conduit and a suitable cable gland to form a cable protection system for sensors. The purpose of this system is to protect the sensor wiring in harsh environments.

Dimensions

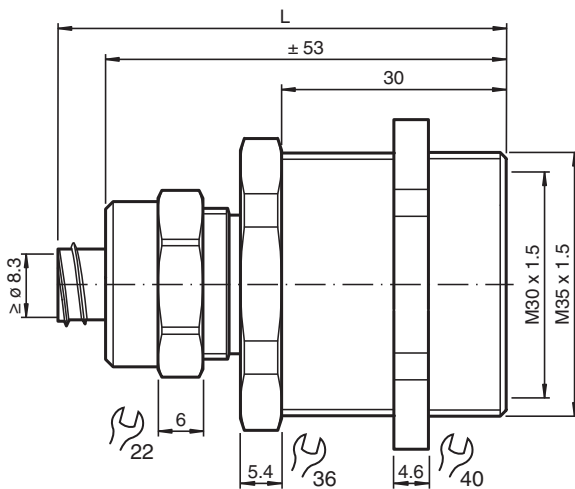

Technical Data

Mechanical specifications

External thread	
Thread type	metric
Thread size	M35 x 1.5
Internal thread	
Thread type	metric
Thread size	M30 x 1.5
Degree of protection	IP65
Material	
Screwed connection	brass, nickel-plated
Slotted nut	brass
Clamping ring	PVC
Mass	133 g

Release date: 2023-06-13 Date of issue: 2023-06-13 Filename: 307501_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com



PF PEPPERL+FUCHS

Technical Data

General information

Scope of delivery	5 item(s)
Supplementary information	observe mounting instructions

Matching System Components

	CP-CGL-SLT-5/16-M16 5pcs	Cable gland M16 for cable diameter 4 ... 8.3 mm and 5/16" flexible coated conduit
	CP-CGL-SLT-5/16-M20 5pcs	Cable gland M20 for cable diameter 4 ... 8.3 mm and 5/16" flexible coated conduit