

**Technical data**

**General specifications**

Sensor range		SU18: 8 mm SU18/35: 25 mm SU19: 8 mm
Fiber optic length	l	2000 mm , adjustable
Fiber optic diameter	d	1.25 mm
Adapter form		00
End piece		thread
Bending radius		min. 15 mm
Fiber configuration	Fv	see dimensions
Angle of divergence		67 °
Accessories provided		Cutter for plastic fiber optics

**Ambient conditions**

Ambient temperature		-55 ... 70 °C (-67 ... 158 °F)
---------------------	--	--------------------------------

**Mechanical specifications**

Material		
Optical face		plastic
Sheathing		PVC
Core		plastic
End piece		Stainless steel 1.4305 / AISI 303

**Model Number**

**KLR-C04-1,25-2,0-K78**

Plastic fiber optic - diffuse

Threading M3

**Features**

- Thread M3

**Series**

**Fiber optic amplifiers**

Device series SU18 ; SU18/35 ; SU19

**Description**

**Attention:**

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.




**Accessories**

**OMH-LL-M3**

Mounting bracket for fiber optic cable, M3 thread

**Dimensions**

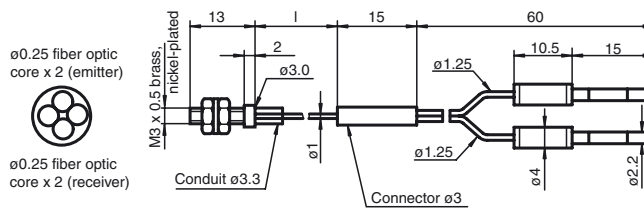

Release date: 2014-07-09 15:55 Date of issue: 2014-07-09 805632\_eng.xml