

# Glass fiber optic


## LLR 04-1,6-1,0-G(M6x30)

- Chemical-resistant



Glass fiber optic - diffuse with metal silicone covering

### Dimensions

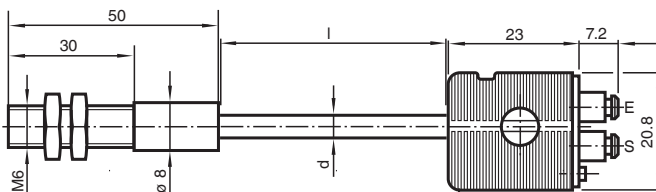

### Technical Data

#### General specifications

Fiber optic length	l	1000 mm
Fiber optic diameter	d	7.3 mm
Adapter form		04
End piece		thread
Bending radius		min. 20 mm
Fiber bundle diameter		1.6 mm optical face: 2 mm <sup>2</sup>
Fiber configuration	Fv	optical seperated
Angle of divergence		approx. 68 °

#### Approvals and certificates

Approvals		CE
-----------	--	----

#### Ambient conditions

Ambient temperature		-20 ... 85 °C (-4 ... 185 °F) [Adapter] -40 ... 180 °C (-40 ... 356 °F) [End head and Covering]
Storage temperature		-20 ... 85 °C (-4 ... 185 °F)

#### Mechanical specifications

Degree of protection		IP65
----------------------	--	------

Release date: 2021-07-05 Date of issue: 2021-07-05 Filename: 415671\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

**Technical Data**

Material	
Optical face	glass
Sheathing	Metal-silicon
Core	Glass fiber
End piece	Stainless steel 1.4305 / AISI 303
Adapter	PVC
Extraction force	at probe at 20°C: 120 N
<b>Fiber optic amplifiers</b>	
Device series	MLV41-LL

## Application

**Attention:**

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.

