



Technical data

General specifications

Sensor range	SU18: 4 mm SU18/35: 12 mm SU19: 4 mm
Fiber optic length	l 2000 mm , adjustable
Fiber optic diameter	d 1.25 mm
Adapter form	00
End piece	thread
Bending radius	min. 10 mm
Fiber configuration	Fv see dimensions
Angle of divergence	67 °
Accessories provided	Cutter for plastic fiber optics

Ambient conditions

Ambient temperature	-55 ... 70 °C (-67 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Material	
Optical face	plastic
Sheathing	PVC
Core	plastic
End piece	Stainless steel 1.4305 / AISI 303

Model Number

KLR-C02-1,0-2,0-K73

Plastic fiber optic - diffuse

Threading M4 / M2, 6

Features

- Optimized for the detection of small parts
- Thread M2.6 / M4

Series

Fiber optic amplifiers

Device series SU18 ; SU18/35 ; SU19

Description

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Accessories

OMH-LL-M4

Mounting bracket for fiber optic cable, M4 thread


KM4-0,5

Metal protection for plastic fiber optics M4 x 0.5 m

KM4-1,0

Metal protection for plastic fiber optics M4 x 1.0 m

Dimensions

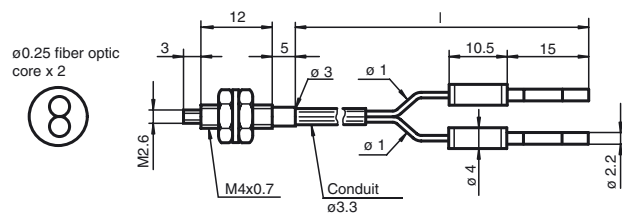

Release date: 2014-07-09 15:54 Date of issue: 2014-07-09 805827_eng.xml