

Connection cable


V93-G-YE1M-STOOW-V93-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 3-pin



Dimensions

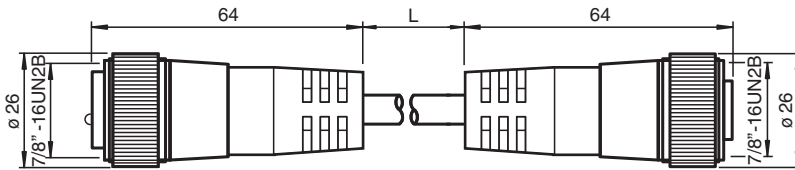

Technical Data

| General specifications | | | |
|----------------------------|----------------|--|---------------------------------|
| Number of pins | | | 3 |
| Connection 1 | | | socket |
| Construction type 1 | | | straight |
| Threading 1 | | | 7/8 inch |
| Connection 2 | | | plug |
| Construction type 2 | | | straight |
| Threading 2 | | | 7/8 inch |
| Electrical specifications | | | |
| Operating voltage | U _B | | max. 600 V |
| Test voltage | | | 1500 V |
| Operating current | I _B | | 13 A |
| Volume resistance | | | < 5 mΩ |
| Approvals and certificates | | | |
| UL approval | | | cULus Listed, General Purpose |
| Ambient conditions | | | |
| Ambient temperature | | | -40 ... 105 °C (-40 ... 221 °F) |
| Mechanical specifications | | | |
| Degree of protection | | | IP67 |
| Material | | | |
| Contacts | | | Cu alloy gold plated |
| Body | | | PVC, yellow |
| Cable | | | PVC |

Release date: 2022-03-15 Date of issue: 2022-03-15 Filename: 70119775_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

| | | |
|-----------------|---|----------------------------------|
| Slotted nut | | nickel-plated brass |
| Core insulation | | PVC |
| Cable | | fine-strand, flexible |
| Sheath diameter | | Ø 9.9 mm |
| Bending radius | | 10 x cable diameter |
| Color | | yellow |
| Cores | | 3 x 1.5 mm ² (16 AWG) |
| Length | L | 1 m |
| Note | | STOOW UL Standard |

Connection



Release date: 2022-03-15 Date of issue: 2022-03-15 Filename: 70119775_eng.pdf