




Stack light audible alarm VAZ-HORN-70MM-105DBA

- Modular design
- Bayonet system for simple mounting and dismounting
- 70-mm-series

Stack light audible alarm



Dimensions

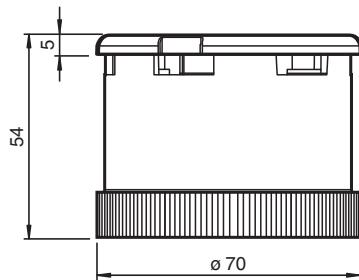

Technical Data

General specifications			
UL File Number			E223176
Color			black
Frequency			approx. 2.5/3.5 kHz Alternating
Loudness			105 dB
Functional safety related parameters			
MTTF _d			1100 a
Electrical specifications			
Rated operating voltage	U _e		24 V DC ± 10 %
Current consumption			40 mA
Surge protection			overvoltage category II
Inrush current			max. 100 mA
Directive conformity			
Electromagnetic compatibility			
Directive 2014/30/EU			EN 60947-5-1:2004+A1:2009 EN 60947-1:2007
Standard conformity			

Release date: 2022-06-30 Date of issue: 2022-06-30 Filename: 301479_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

pf PEPPERL+FUCHS

Technical Data

Degree of protection	EN 60529:2000
Ambient conditions	
Ambient temperature	-20 ... 50 °C (-4 ... 122 °F)
Pollution degree	3
Mechanical specifications	
Degree of protection	IP65 (mounted)
Connection	Bayonet system
Material	
Housing	PC

Matching System Components

	VAZ-CLAMP-70MM-90°	Stack light terminal base with cover plate
	VAZ-70MM-IO	Signal tower connection element IO-Link with cover