




## Cable socket, shielded V15-W-10M-PUR-ABG5

- Degree of protection IP67 / IP68 / IP69
- Halogen-free
- Shield connected to pin 5
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Female cordset single-ended M12 angled A-coded 5-pin, shield on pin 5, PUR cable grey, shielded



### Dimensions

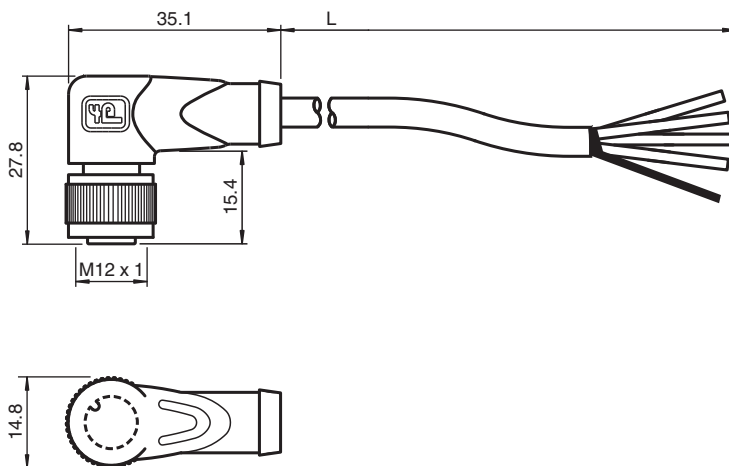

### Technical Data

#### General specifications

|                   |                  |
|-------------------|------------------|
| Connector 1       |                  |
| Connection        | socket           |
| Construction type | M12              |
| Style             | angled           |
| Locking           | screw connection |
| Number of pins    | 5                |
| Coding            | A-coded          |
| Connector 2       |                  |
| Connection        | cable end        |

#### Electrical specifications

|                   |       |                        |
|-------------------|-------|------------------------|
| Operating voltage | $U_B$ | max. 48 V AC / 60 V DC |
| Operating current | $I_B$ | max. 4 A               |

#### Conformity

|                      |                                     |
|----------------------|-------------------------------------|
| Degree of protection | EN 60529                            |
| Plug connection      | connector M12 x 1 : IEC 61076-2-101 |

Release date: 2021-02-27 Date of issue: 2021-02-27 Filename: 245048\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

## Technical Data

|                                  |   |   |
|----------------------------------|---|---|
| Halogen-free                     |   | DIN VDE 0472-815<br>DIN EN 50267-2-1                            |
| <b>Ambient conditions</b>        |   |   |
| Ambient temperature              |   |   |
| Plug connector                   |   | -40 ... 90 °C (-40 ... 194 °F)                                  |
| Cable, fixed                     |   | -40 ... 80 °C (-40 ... 176 °F)                                  |
| Cable, flexing                   |   | -25 ... 80 °C (-13 ... 176 °F)                                  |
| Pollution degree                 |   | 3   |
| <b>Mechanical specifications</b> |   |   |
| Plug connector                   |   |   |
| Tightening torque                |   | 0.6 Nm  |
| Loosening protection             |   | available   |
| Tool installation                |   | straight knurling   |
| Mating cycles                    |   | min. 100  |
| Shielding                        |   | shield connected to pin 5                                       |
| Degree of protection             |   | IP67 / IP68 / IP69  |
| Cable                            |   | according to IEC/EN 60228 (DIN VDE 0295) class 5                |
| Sheath diameter                  |   | 4.8 mm  |
| Bending radius                   |   | > 10 x cable diameter, moving<br>> 5 x cable diameter, fixed    |
| Sheath stripping force           |   | max. 100 N / 300 mm   |
| Sheath color                     |   | grey (similar to RAL 7001)                                      |
| Number of cores                  |   | 4   |
| Core cross-section               |   | 0.34 mm <sup>2</sup>  |
| Cores color                      |   | Core 1: brown<br>Core 2: white<br>Core 3: blue<br>Core 4: black |
| Core construction                |   | 19 x 0.15 mm Ø  |
| Shield                           |   | tinned copper braiding, 85 % coverage                           |
| Length                           | L | 10 m  |
| Cable code                       |   | Li 9Y 11YM 4 x 0.34   |
| <b>Material</b>                  |   |   |
| Halogen-free                     |   | yes   |
| Plug connector                   |   |   |
| Screw connection                 |   | Zinc diecast, nickel-plated                                     |
| Body                             |   | TPU, black  |
| Contact surface                  |   | Au  |
| Flammability                     |   | V-2   |
| Cable                            |   |   |
| Sheathing                        |   | PUR based on polyether  |
| Core insulation                  |   | PP  |
| Chemical resistance              |   | good  |

## Connection Assignment

